

# **SG0MV-X2** ELECTRONIC HANDICAP CHIME/GONG



## A . D . A

### ELECTRONIC HANDICAP CHIME/GONG

Highly reliable, solid state chime for lanterns. Adjustable volume for varied environments, and ambient noise levels. The gong rings once for up and twice for down. It features a removable jumper to select the up and down configuration.

#### FEATURES:

- > Arrival chime

#### FEATURES:

- > Adjustable volume
- > Compact design
- > 1 year factory warranty
- > 100+ decibels rating
- > Conforms to ADAAG 4.10.4
- > Fast 3M Scotchmate fastening
- > 24V to 120 V AC/DC +/-
- > Dual or Single Stroke Available and Field Selectable
- > High / Low Voltage Available and Field Selectable
- > Low Works on Full Range 24-120 Volt + or -
- > High Works from 60-120 AC/DC + or - used to Block Stray Voltage in Noisy Environment



**C.E. Electronics, Inc.**  
C.E. Electronics, Ltd.  
International Lift Equipment (ILE)

2107 Industrial Drive Bryan, OH 43506  
Marlow, Bucks, UK  
Highams Park, London, UK

ph: 419.636.6705

ph: +44 (0) 1628 487633  
ph: 0208 527 9669

[www.ceelectronics.com](http://www.ceelectronics.com)

[www.ceelectronics.co.uk](http://www.ceelectronics.co.uk)  
[www.ileweb.com](http://www.ileweb.com)







C.E. Electronics, Inc.  
 2107 Industrial Drive  
 Bryan, OH 43506  
 PH (419) 636-6705 FX (419) 636-2516  
 www.ceelectronics.com

# SGOMV-X2

Ver. 1 Rel. 9/23/2014

A.D.A.

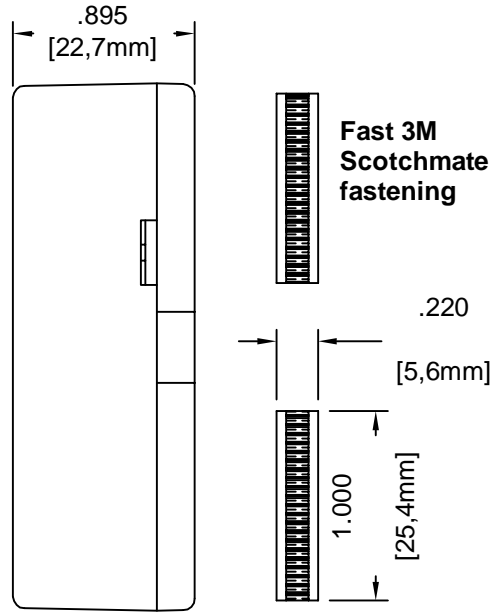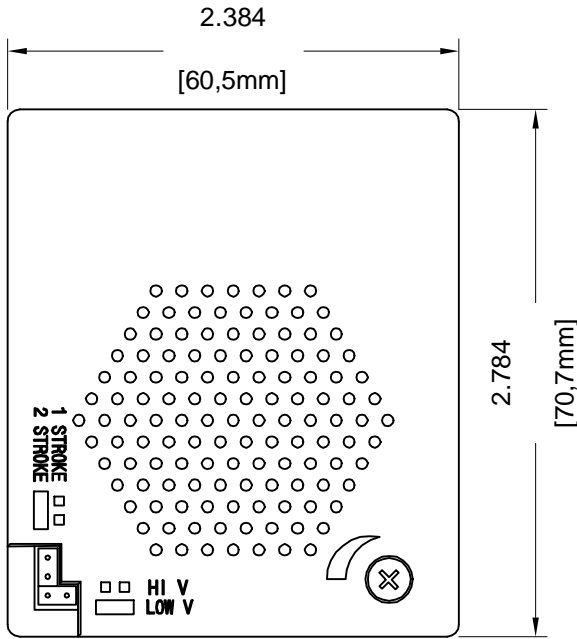

## ELECTRONIC HANDICAP CHIME/GONG



Highly reliable, solid state chime for lanterns. Adjustable volume for varied environments, and ambient noise levels. The gong rings once for up and twice for down. It features a removable jumper to select the up and down configuration.

### Typical applications:

- Arrival chime

### Features:

- Adjustable volume
- Compact design
- 1 year factory warranty
- 100+ decibels rating
- Conforms to ADAAG 4.10.4
- Fast 3M Scotchmate fastening
- 24V to 120V AC/DC +/-
- Dual or Single Stroke Available and Field Selectable
- High / Low Voltage Available and Field Selectable
- Low Works on Full Range 24-120 Volt + or -
- High Works from 60-120 AC/DC + or - used to Block Stray Voltage in Noisy Environment

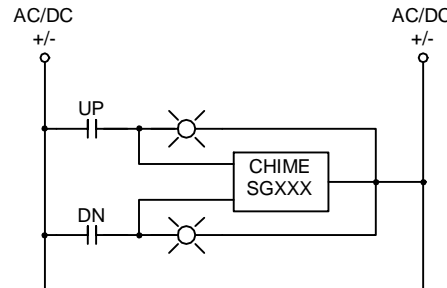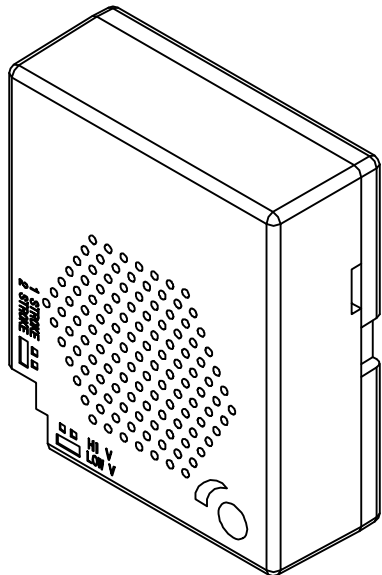

TO ORDER - SPECIFY SGOMV- X 2

### POLARITY:

- "B" = BOTH POSITIVE AND NEGATIVE
- "P" = POSITIVE UP/DOWN INPUT
- "N" = NEGATIVE UP/DOWN INPUT

### NOTE:

If a special voltage is required, please consult factory.