

9.700"

Warning! - When you apply AC power to this box, it activates the battery backup circuitry. When AC power is removed, the battery begins to discharge. If you test the system before installation, or if you expect long-term power outages, disconnect the battery wires inside the box to avoid battery damage.




**CALL C.E. ELECTRONICS
AT (419) 636-6705 FOR
REPLACEMENT PARTS:
BATTERIES - 89083FM8
BATTERY HARNESS - 9X00000387**

DIMMER FUNCTION

- 0 - BRIGHTEST LEVEL
- 1 - LIGHTS OFF
- 2 - ONE LEVEL DIMMER
- 3 - TWO LEVELS DIMMER
- F - DIMMEST LEVEL

TYPICAL LAMP CONNECTION
PART# SK077L-X OR SK120L-X

OPTIONAL ALARM

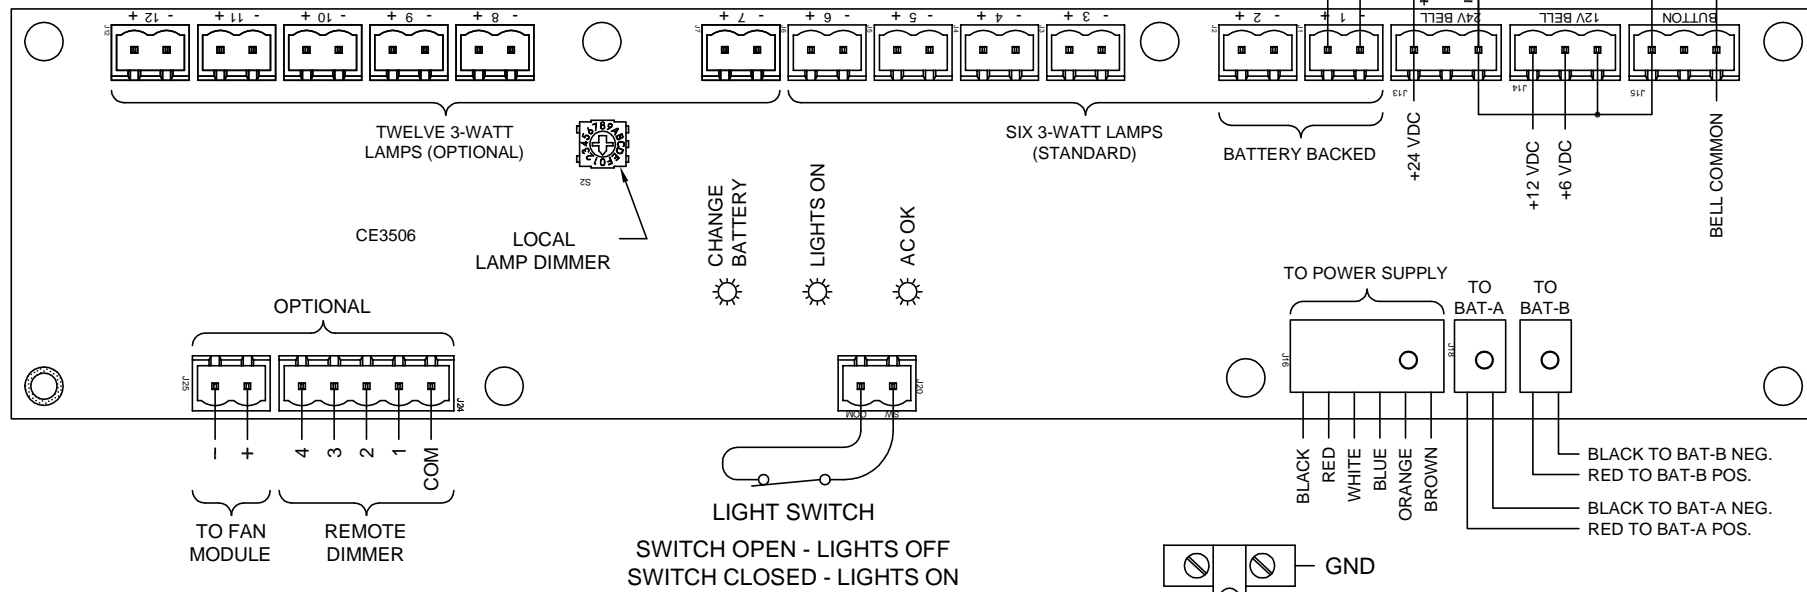


5.625"

Fan module output active when lights are ON

NOTE: To use a remote dimmer control, set the local dimmer control to 0

UNIT POWER
100 - 240 VAC
50 - 60 Hz



**SKCAB 3W
CAB LIGHTING BOARD**

C.E.# 11100188