


MO220-XX



JOB# _____

CODE VERSION _____


BOARD VERSION CE2820 _____

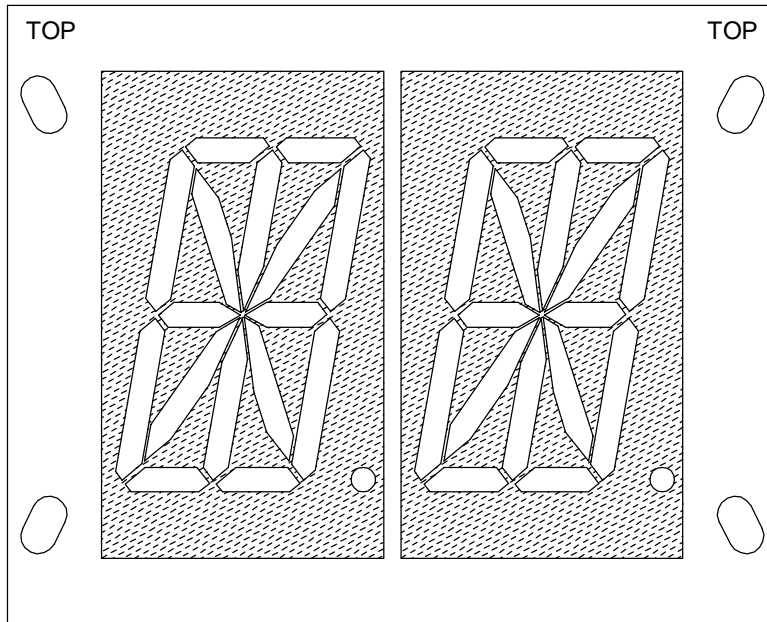

DEFAULT SETTINGS

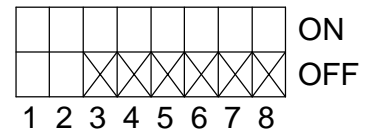


DIP SWITCH DETAIL



PASSING CHIME CONNECTOR

MICRO
COMM
INPUT

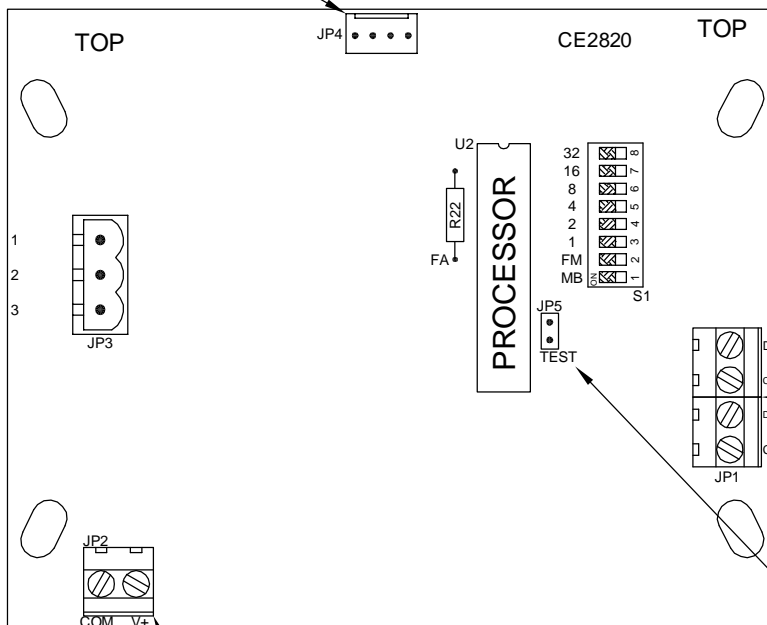

NOT USED - MAKE
NO CONNECTIONS

NOT USED - MAKE
NO CONNECTIONS

SHORT PINS TO START
SELF-TEST MODE.
SHORT AGAIN TO EXIT.
DISPLAY CYCLES
00, 11...88, 99, TT, XX.

The Micro Comm driver must be programmed to send messages with the level required to activate the signals listed below. Level 0 messages will always be displayed, regardless of DIP switch or resistor settings.

For message blocking, turn on DIP switch 1 (MB). This will block level 1 and level 3 messages from being displayed.

To blank the display during a fire main (level three) message, turn on DIP switch 2 (FM).

To blank the display during a fire alternate (level two) message, remove resistor R22 (FA) from the board.

NOTE: MUST BE USED WITH A CLASS 2 POWER SUPPLY.

DATE DRAWN: 11/18/05	DRAWN BY: DAC	REQUESTED BY: DR	C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, Ohio 43006 (419) 636-6705
BOARD NUMBER: 2820	LAST DATE REVISED: -	APPROVED BY:	
PRODUCT: MO220 Position Indicator	DWG. NO. MO220_01	REV. -	