



# DV1 30-R0XXX

DOT MATRIX LED DIGITAL INDICATOR



## DOT MATRIX

3" CHARACTER

Dot Matrix LED digital indicator for floor position display. Any alphanumeric or custom character can be displayed.

### TYPICAL APPLICATIONS:

- > Hall stations
- > Jamb mount

### FEATURES:

- > Low cost design
- > Self contained unit
- > Latched input
- > Self testing
- > 13 inputs
- > Passing chime output
- > Error detection and correction feature
- > UL listed



**C.E. Electronics, Inc.**  
C.E. Electronics, Ltd.  
International Lift Equipment (ILE)

2107 Industrial Drive Bryan, OH 43506  
Marlow, Bucks, UK  
Highams Park, London, UK

ph: 419.636.6705

ph: +44 (0) 1628 487633  
ph: 0208 527 9669

[www.ceelectronics.com](http://www.ceelectronics.com)

[www.ceelectronics.co.uk](http://www.ceelectronics.co.uk)  
[www.ileweb.com](http://www.ileweb.com)







C.E. Electronics, Inc.  
 2107 Industrial Drive  
 Bryan, OH 43506  
 PH (419) 636-6705 FX (419) 636-2516  
 www.ceelectronics.com

# DV130-R0XXX

Ver. 3 Rel. 11/06/08

COMPETITOR  
 DOT MATRIX

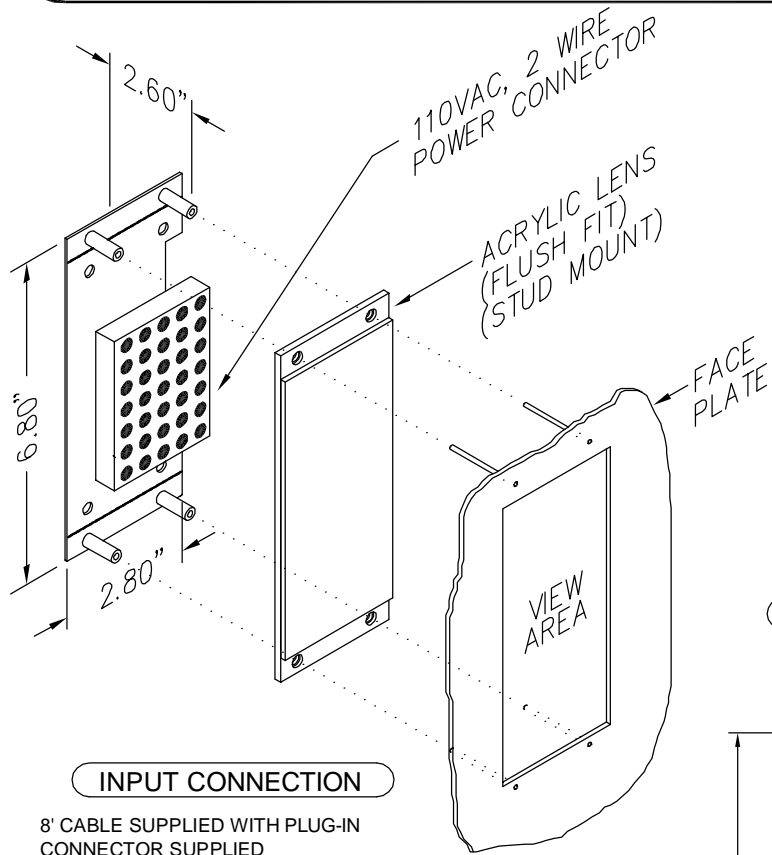


3" CHARACTER

**RENEWAL PARTS**

- Lens: 104-5575 RED
- Lens: 104-6075 GRAY

**PANEL PREPARATION**

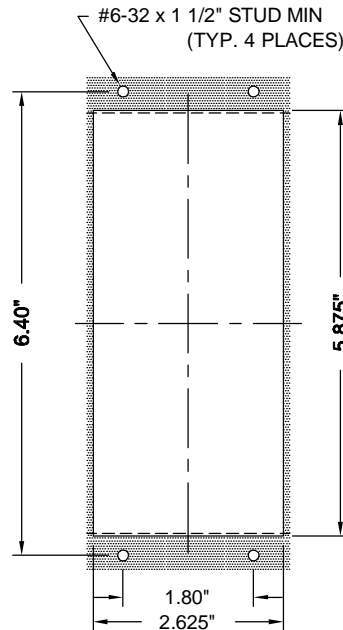

CUTOUT TOLERANCE: +.020  
 -0.0

**DOT MATRIX LED DIGITAL INDICATOR**

Dot matrix LED digital indicator for floor position display. Any alphanumeric or custom character can be displayed.

Typical Applications

- Hall stations
- Jamb mount

Features

- Low cost design
- Self contained unit
- Latched input
- Self testing
- 13 inputs
- Passing chime output
- Error detection and correction feature
- UL listed

TO ORDER:-SPECIFY DV130 - R 0 X X X

COLOR:  
 "R" = RED

NUMBER OF INPUTS:  
 "0" = 13 INPUT OR LESS

SIGNAL VOLTAGE:  
 "A" = POSITIVE 6-20VDC, 6-24VAC  
 "B" = POSITIVE 24-48VDC, 24-48VAC  
 "C" = 120VAC  
 "D" = POSITIVE 125VDC  
 "E" = NEGATIVE 6-20VDC  
 "F" = NEGATIVE 24-48VDC  
 "G" = NEGATIVE 125VDC

LENS:  
 "R" = RED  
 "X" = NO LENS

SIGNAL FORMAT:  
 "1" = SINGLE LINE/FLOOR  
 "2" = BINARY  
 "3" = UNITS & TENS  
 "4" = GRAY CODE  
 "5" = INVERTED BINARY  
 "6" = SPECIAL

**NOTE:**

1. If a special voltage is required, please consult factory.