


> SH122-XXXXX

2.2" CHARACTER | 2.5" ARROW

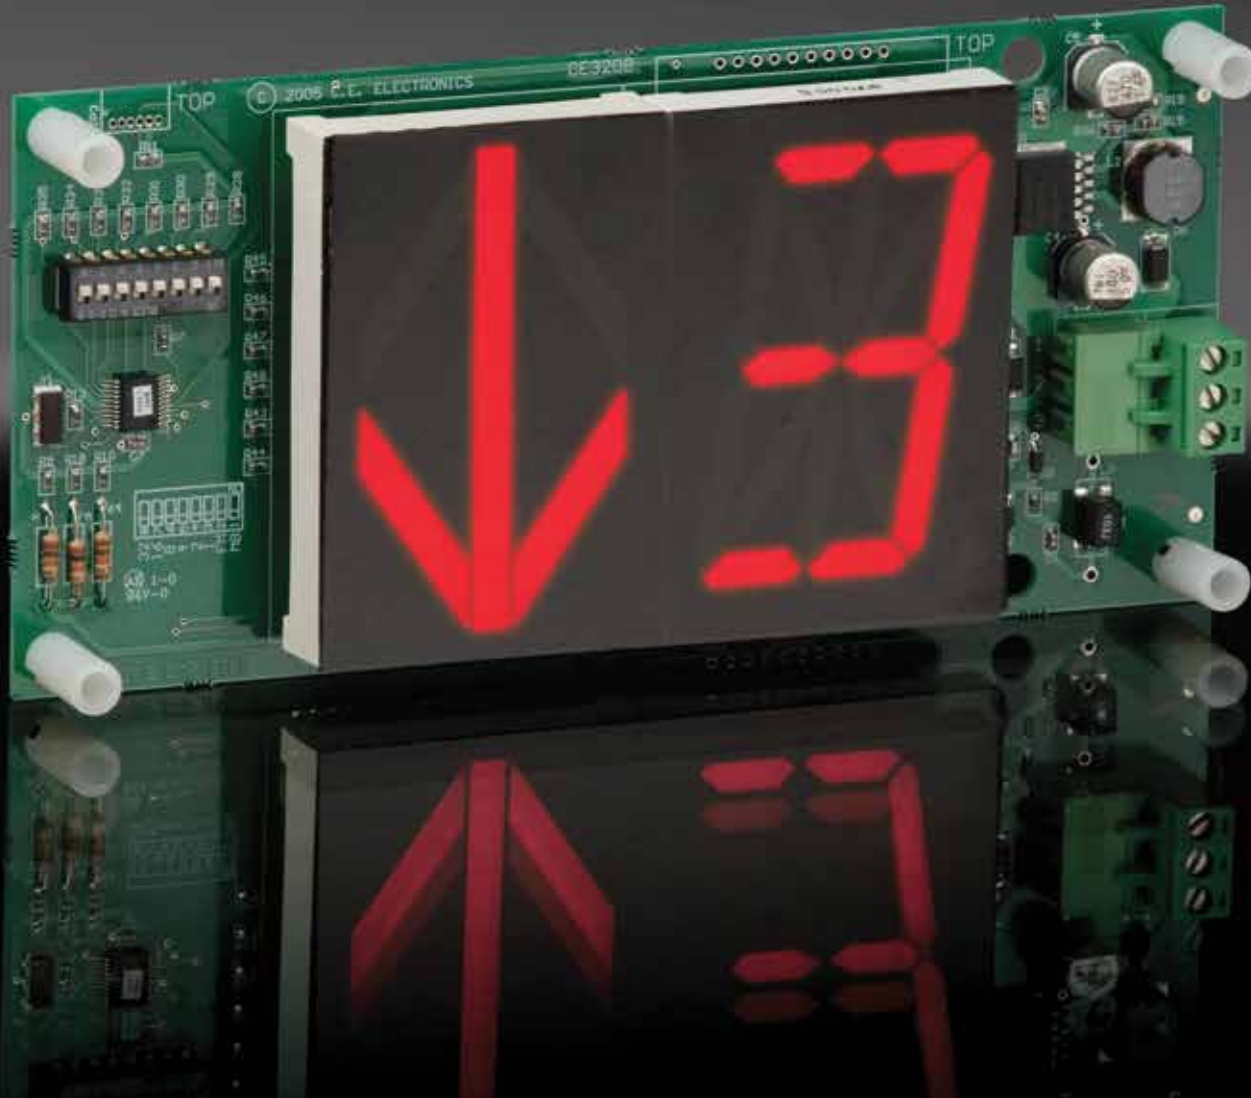

SEGMENTED

2.2" CHARACTER | 2.5" ARROW

Segmented LED main digital indicator for floor position display, as well as car direction. Any alphanumeric character can be displayed in single digit floor designations.

TYPICAL APPLICATIONS:

- > Car-OP panel
- > Transom-car or hall

FEATURES:

- > Self contained
- > Auxiliary outputs
- > Latched inputs
- > On board power supply
- > Self testing
- > Passing chime output
- > Error detection & correction feature
- > UL
- > 8 Inputs & Up/Down



C.E. Electronics, Inc.
C.E. Electronics, Ltd.
International Lift Equipment (ILE)

2107 Industrial Drive Bryan, OH 43506
Marlow, Bucks, UK
Highams Park, London, UK

ph: 419.636.6705
ph: +44 (0) 1628 487633
ph: 0208 527 9669

www.cееlectronics.com
www.cееlectronics.co.uk
www.ileweb.com






C.E. Electronics, Inc.
 2107 Industrial Drive
 Bryan, OH 43506
 PH (419) 636-6705 FX (419) 636-2516
 www.ceelectronics.com

SH122-XXXXX

Ver. 6 Rel. 09/09/2011

SEGMENTED
DISPLAYS

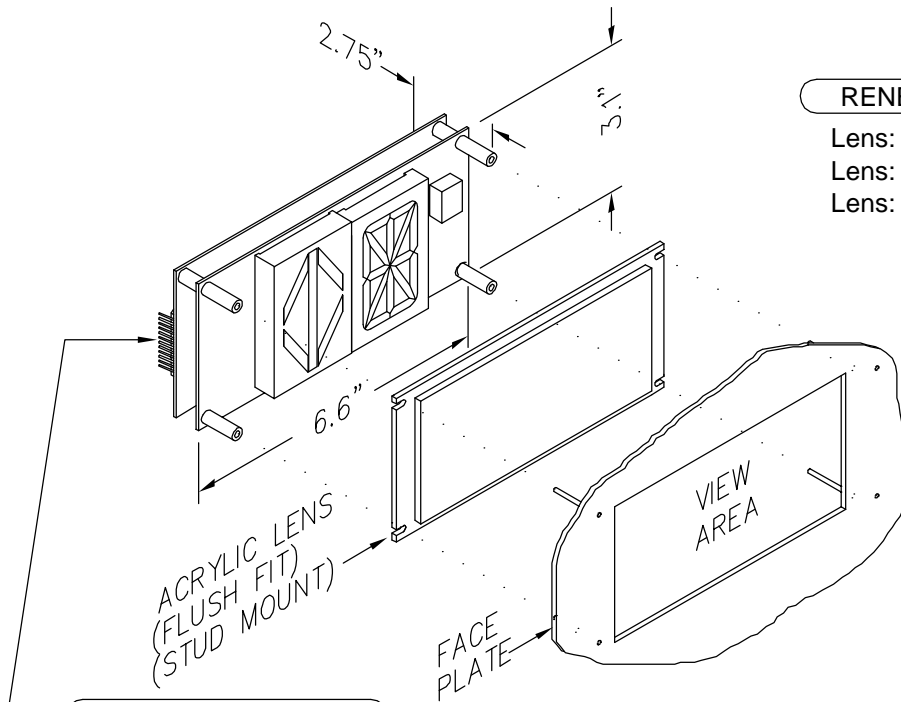


RENEWAL PARTS

- Lens: 104-5602M RED
- Lens: 104-6002M GRAY
- Lens: 104-9002 BLUE

SEGMENTED 2.2" DISPLAY

Segmented LED main digital indicator for floor position display, as well as car direction. Any alphanumeric character can be displayed in single digit floor designations.

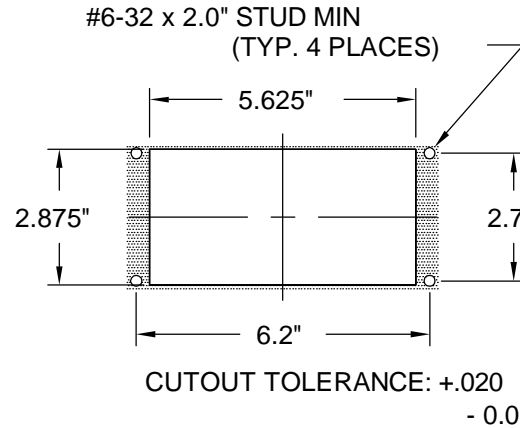

Typical applications:


- Car-OP panel
- Transom-car or hall

Features:

- Self contained
- Auxiliary output
- Latched inputs
- On board power supply
- Self testing
- Passing chime output
- Error detection and correction feature
- UL
- 8 Inputs & Up/Down

INPUT CONNECTION

8' CABLE WITH PLUG-IN CONNECTOR SUPPLIED.

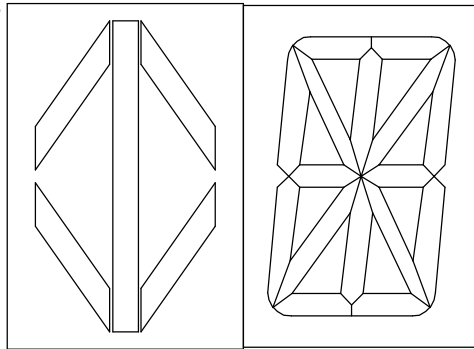

2.2" CHARACTERS
2.5" ARROW

NOTE:

1. * May need additional decoder card
2. If a special voltage is required, please consult factory.
3. **Required 110VAC or optional 220VAC - Consult factory for 220AC**

TO ORDER - SPECIFY SH122 - X X X X X

COLOR:

- "RR" RED CHARACTER / RED ARROW
- "GR" GREEN CHARACTER / RED ARROW
- "RG" RED CHARACTER / GREEN ARROW
- "GG" GREEN CHARACTER / GREEN ARROW
- "BB" BLUE CHARACTER / BLUE ARROW
- "WW" WHITE CHARACTER / WHITE ARROW

SIGNAL VOLTAGE:

- "A" = POSITIVE 6-20VAC/DC, 24VAC
- "B" = POSITIVE 24-48VDC, 48VAC
- "C" = POSITIVE 120VAC
- "D" = POSITIVE 125VDC
- "E" = NEGATIVE 6-20VDC
- "F" = NEGATIVE 24-48VDC
- "G" = NEGATIVE 125VDC

LENS:

- "R" = RED
- "G" = GRAY
- "B" = BLUE
- "X" = NO LENS


SIGNAL FORMAT:

- "1" = SINGLE LINE / FLOOR *
- "2" = BINARY
- "3" = UNITS & TENS *
- "4" = GRAY CODE
- "5" = INVERTED BINARY
- "6" = SPECIAL


SHCDU

JOB# _____



DIP SWITCH DETAIL



- 1 SELF-TEST
- 2 FAST SELF-TEST
- 3 PLAY STROBE INVERT / INPUT TEST
- 4 MESSAGE/ARRIVAL COMBO
- 5 MESSAGE PORT MODE SELECT
- 6 ZERO SCAN SLOT
- 7 NOT USED
- 8 INVERT MESSAGE MODULE DATA



DEFAULT SETTINGS

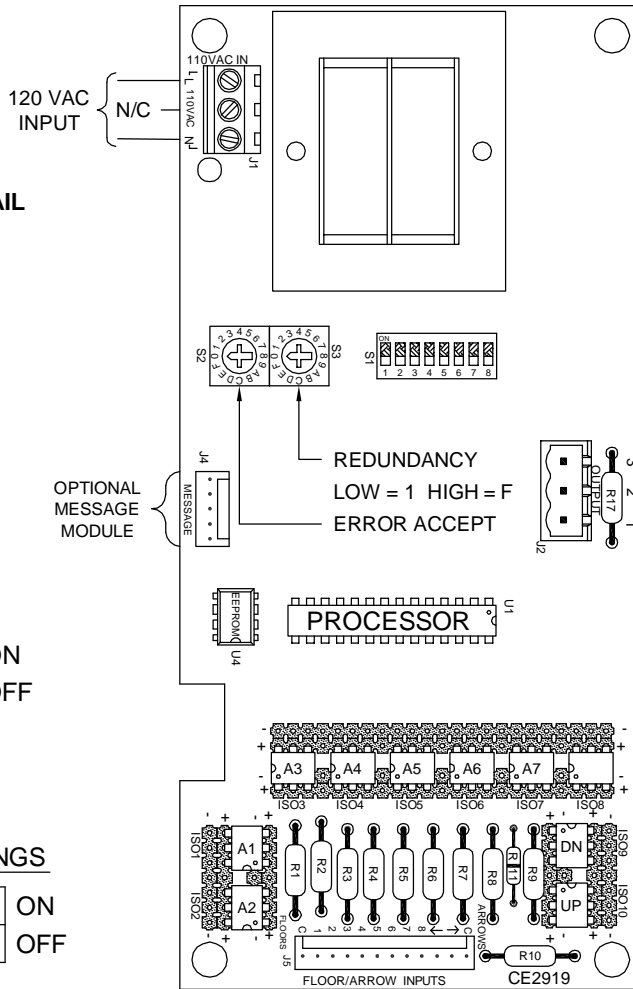

ROTARY SWITCH S2 _____
 ROTARY SWITCH S3 _____
 CODE VERSION _____
 BOARD VERSION CE2919 _____


REDUNDANCY
 LOW = 1 HIGH = F
 ERROR ACCEPT

MICRO COMM
 OUT TO DISPLAY,
 VOICE, ETC.

TYPICAL MICRO COMM
 CONNECTOR
 1=COM 2=V+ 3=DATA
 BLACK RED WHITE

NOTE: OPTOS ARE SHOWN IN THE
 POSITIVE POSITION. FOR NEGATIVE
 POLARITY, THE OPTOS ARE INSTALLED
 IN THE OTHER SET OF SOCKETS.

BINARY CHART ON BACK

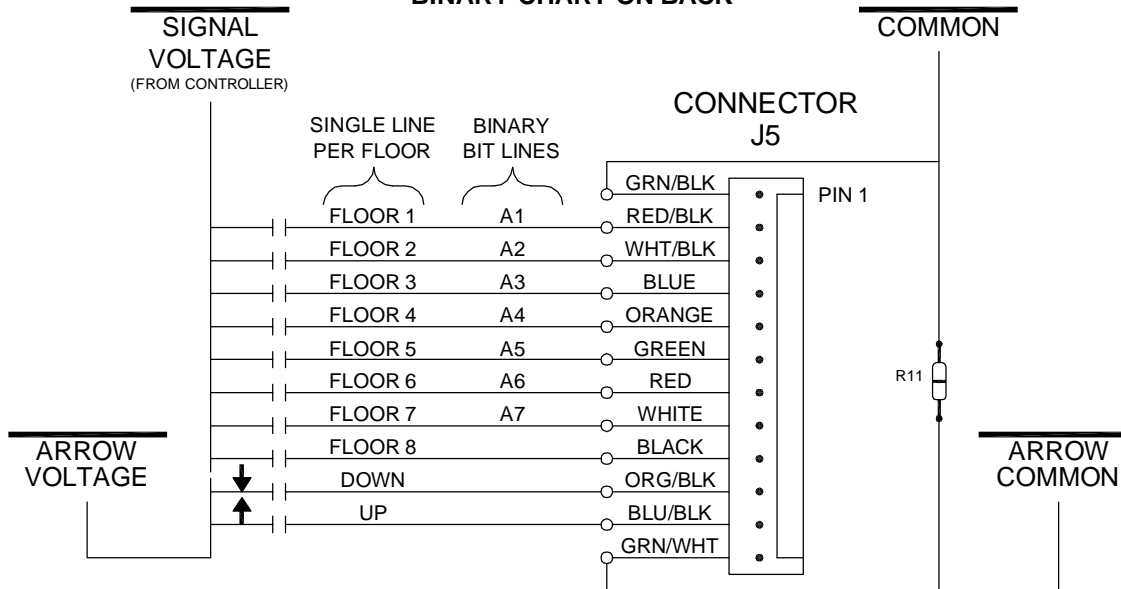


NOTE: COMMONS ARE TIED TOGETHER. IF FLOOR SIGNAL AND ARROW VOLTAGES ARE DIFFERENT, COMMONS MAY BE SEPARATED. CONTACT TECH SUPPORT AT 419-636-6705 FOR MORE INFORMATION.

DATE DRAWN: 03/28/03	DRAWN BY: KLS	REQUESTED BY: DC	C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, Ohio 43006 (419) 636-6705
BOARD NUMBER: CE2919	LAST DATE REVISED: 03/15/07	APPROVED BY:	
PRODUCT SHCDU MICRO COMM DRIVER			
DWG. NO. SHCDU055			REV. B

BINARY FLOOR CHART

BINARY BITS



1000000 _____			
0111111 _____	0101111 _____	0011111 _____	0001111 _____
0111110 _____	0101110 _____	0011110 _____	0001110 _____
0111101 _____	0101101 _____	0011101 _____	0001101 _____
0111100 _____	0101100 _____	0011100 _____	0001100 _____
0111011 _____	0101011 _____	0011011 _____	0001011 _____
0111010 _____	0101010 _____	0011010 _____	0001010 _____
0111001 _____	0101001 _____	0011001 _____	0001001 _____
0111000 _____	0101000 _____	0011000 _____	0001000 _____
0110111 _____	0100111 _____	0010111 _____	0000111 _____
0110110 _____	0100110 _____	0010110 _____	0000110 _____
0110101 _____	0100101 _____	0010101 _____	0000101 _____
0110100 _____	0100100 _____	0010100 _____	0000100 _____
0110011 _____	0100011 _____	0010011 _____	0000011 _____
0110010 _____	0100010 _____	0010010 _____	0000010 _____
0110001 _____	0100001 _____	0010001 _____	0000001 _____
0110000 _____	0100000 _____	0010000 _____	0000000 _____

INSTALLATION GUIDE

1. Supply 110VAC power to the outer terminals of connector J1. The center terminal is not connected.
2. Turn on DIP switch one to start self-test. The unit will cycle through the floor/message data. Verify the floor markings displayed are the ones required for the job.
3. Verify the input resistors are fully seated in their sockets.
4. Connect the unit to the controller through the 12-pin MTA connector. The voltage, polarity, and input connections are marked on the reverse side of this diagram. This unit works like a light bulb. It must have voltage from common to the selected input.
5. For Single Line per Floor connections, there should only be one floor input wire with voltage present (with reference to common) at any time.
6. If the unit fails to operate properly, write down the serial number from the white job label on the unit and exactly what is displayed for each floor input. Contact Customer Tech Support at 419-636-6705.

DATE DRAWN: 06/23/05	DRAWN BY: DAC	REQUESTED BY: DAC	C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, Ohio 43006 (419) 636-6705
BOARD NUMBER: N/A	LAST DATE REVISED: -	APPROVED BY:	
PRODUCT: SMCDU BINARY FLOOR CHART			DWG. NO. SMCDU008 REV. -