





C.E. Electronics, Inc.
 2107 Industrial Drive
 Bryan, OH 43506
 PH (419) 636-6705 FX (419) 636-2516
 www.ceelectronics.com

MH222E-XXXX

Ver. 8 Rel. 10/19/2016

MICRO COMM[®]
 DISPLAYS

* Surface mount depth of 1 inch available without passing chime option.

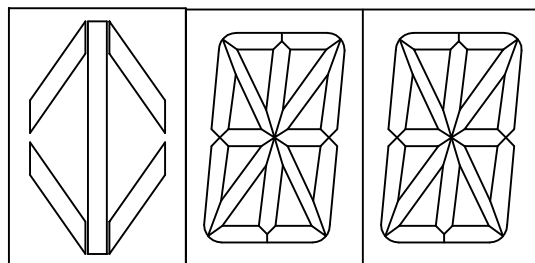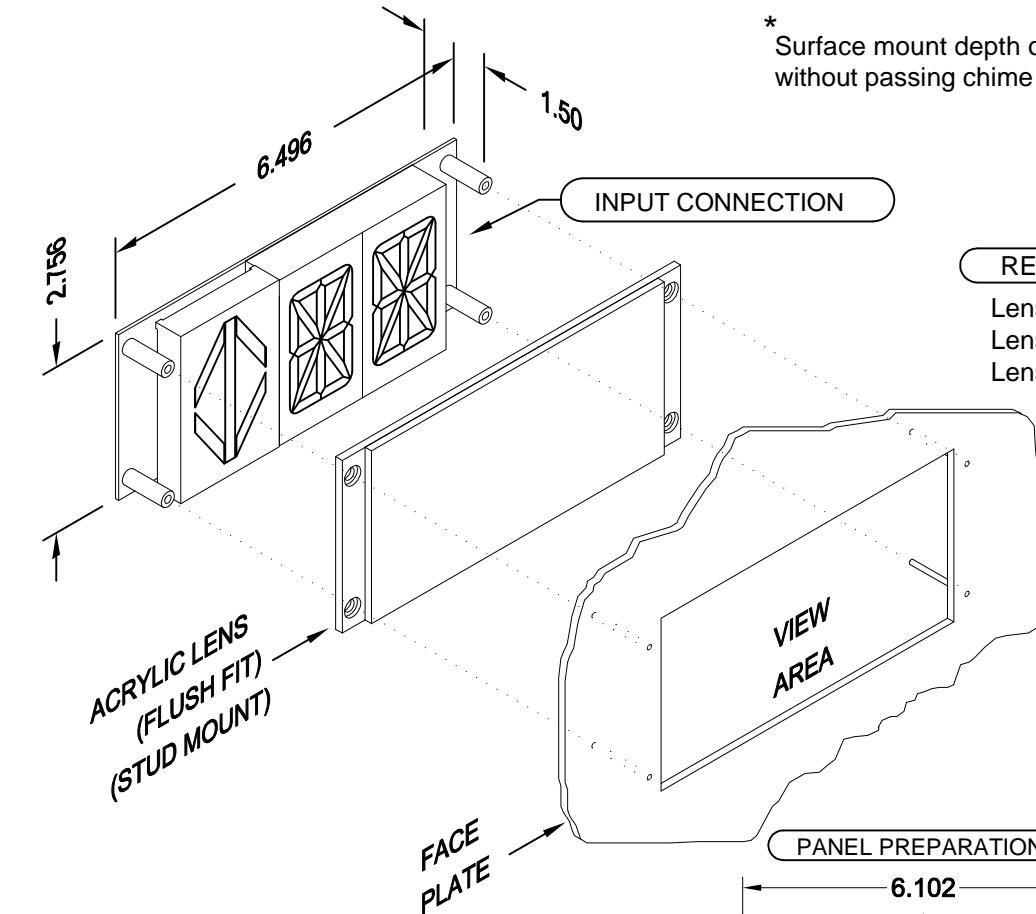

2.2 INCH CHARACTERS
 2.5 INCH ARROW

NOTE:

1. This is not a stand alone unit. Must be used in conjunction with a Micro Comm interface.

- RENEWAL PARTS**
- Lens: 104-5602M RED
 - Lens: 104-6002M GRAY
 - Lens: 104-9044 BLUE

REMOTE DISPLAY INDICATOR "RDI"

Segmented LED, digital indicator for floor position display. Any alphanumeric character can be displayed in either single or double digit floor designations.

Typical Applications:

- Car-OP Panel
- Transom-car or Hall

Features:

- Fast, 3-wire hookup
- Latched inputs
- Cross wire protected
- Self testing
- Alternate message
- Passing chime output
- Error detection and correction feature
- Reduced PC board height

TO ORDER - SPECIFY MH222E - X X X X

COLOR:

- "RR" = RED CHARACTER, RED ARROW
- "GR" = GREEN CHARACTER, RED ARROW
- "GG" = GREEN CHARACTER, GREEN ARROW
- "RG" = RED CHARACTER, GREEN ARROW
- "BB" = BLUE CHARACTER, BLUE ARROW
- "WW" = WHITE CHARACTER, WHITE ARROW

LENS:

- "R" = RED
- "G" = GRAY
- "B" = BLUE
- "X" = NO LENS

for surface mount app. —> "W" = WIRE CONNECTIONS
 <BLANK> = GREEN CONNECTOR