




C.E. Electronics, Inc.  
 2107 Industrial Drive  
 Bryan, OH 43506  
 PH (419) 636-6705 FX (419) 636-2516  
 www.ceelectronics.com

# EV115-XXXXX

Ver. 5 Rel. 02/09/2012


EUROPEAN  
 SERIES

## PANEL PREPARATION

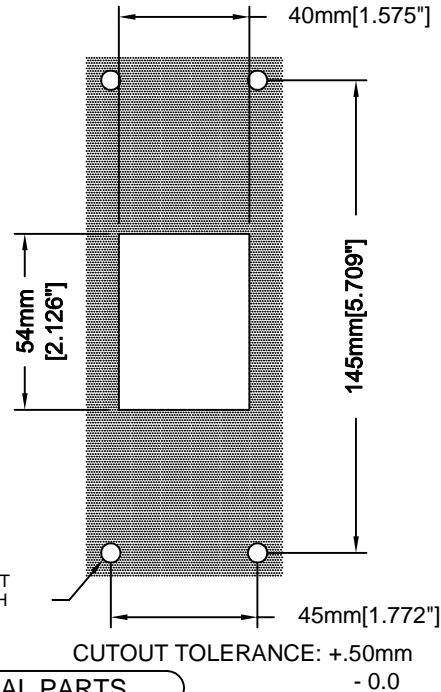

## RENEWAL PARTS

- Lens: 104-5657 RED
- Lens: 104-6109 GRAY
- Lens: 104-9109 BLUE



## DOT MATRIX

Dot Matrix LED Digital Indicator for floor position display, as well as car direction, if desired. Any alphanumeric or custom character can be displayed in single digit floor designations.

### Typical Applications:

- Car-OP Panel
- Transom-car or Hall

### Features:

- Low cost design
- Self contained unit
- Latched input
- Scrolling & roll over
- Hall lantern option
- Passing chime output
- Self Testing
- Message inputs
- Error detection and correction feature

## TO ORDER - SPECIFY EV115 - X X X X X

### COLOR:

- "R" = RED
- "A" = AMBER
- "G" = GREEN
- "B" = BLUE
- "W" = WHITE

### LENS:

- "R" = RED
- "G" = GRAY
- "B" = BLUE
- "X" = NO LENS

### NUMBER OF INPUTS:


- "1" = 8 INPUT
- "2" = 15 INPUT
- "M" = MICRO COMM 3 WIRE INPUT \*
- "P" = MICRO COMM INPUT W/ PASSING CHIME \*
- "S" = BOTH DIRECT & MICRO COMM INPUT

### SIGNAL VOLTAGE:

- "A" = POSITIVE 6-20VDC, 6-24VAC
- "B" = POSITIVE 24-48VDC, 24-48VAC
- "C" = 120VAC
- "D" = POSITIVE 125VDC
- "E" = NEGATIVE 6-20VDC
- "F" = NEGATIVE 24-48VDC
- "G" = NEGATIVE 125VDC
- "X" = IF MICRO COMM

### SIGNAL FORMAT:

- "1" = SINGLE LINE/FLOOR
- "2" = BINARY
- "4" = GRAY CODE
- "6" = SPECIAL
- "X" = NO SELECTION

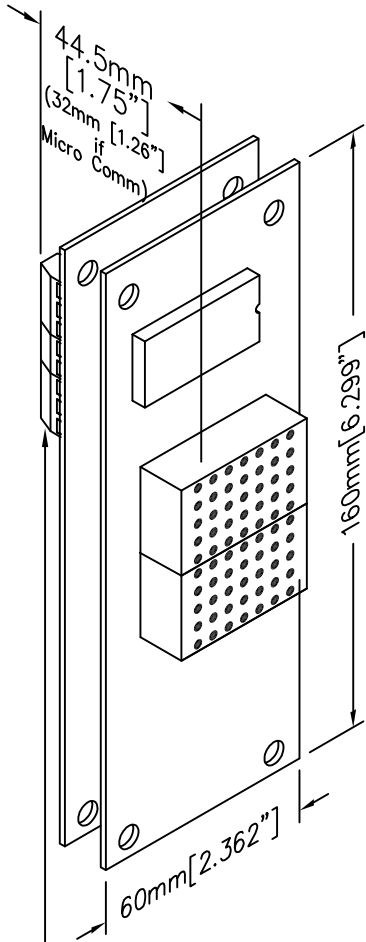

## INPUT CONNECTION

SCREW TYPE INPUT CONNECTOR  
 12-24VAC/DC INPUT POWER  
 AND SIGNAL INPUTS

### NOTE:

1. If a special voltage is required, please consult factory.
2. A supply of 12-24VAC/DC positive or negative is also required.
- \*3. This is not a stand alone unit. Must be used in conjunction with a Micro Comm interface.