

MVIDSYS-X VIDEO OVERLAY



ACCESSORIES VIDEO OVERLAY

The MVIDSYS-X is an overlay system that can add floor position and direction to any NTSC or PAL-B video signal for security and liability applications. If the information is available on the link, the unit can also provide messages that are needed for elevator status. Installation of the unit utilizes existing coax wiring to the monitor, but will require the 3 wire Micro Comm link for the elevator information. This information can be gathered from an existing Micro Comm link in the car or can be obtained by installing a driver in the machine room and bringing the data down to the car on the 3 wire serial link to display floor position and elevator status.

FEATURES:

- > Powered by MICRO COMM
MICRO COMM driver not included
- > Adjustable positioning
- > Message handling
- > Easy installation
- > NTSC compatible
- > PAL-B compatible
- > Other interfaces can be made available such as CAN or RSL if needed (these links are subject to approval).



C.E. Electronics, Inc.
C.E. Electronics, Ltd.
International Lift Equipment (ILE)

2107 Industrial Drive Bryan, OH 43506
Marlow, Bucks, UK
Highams Park, London, UK

ph: 419.636.6705

ph: +44 (0) 1628 487633
ph: 0208 527 9669

www.ceelectronics.com


www.ceelectronics.co.uk
www.ileweb.com





MVIDSYS-X

Ver. 4 Rel. 01/04/2013

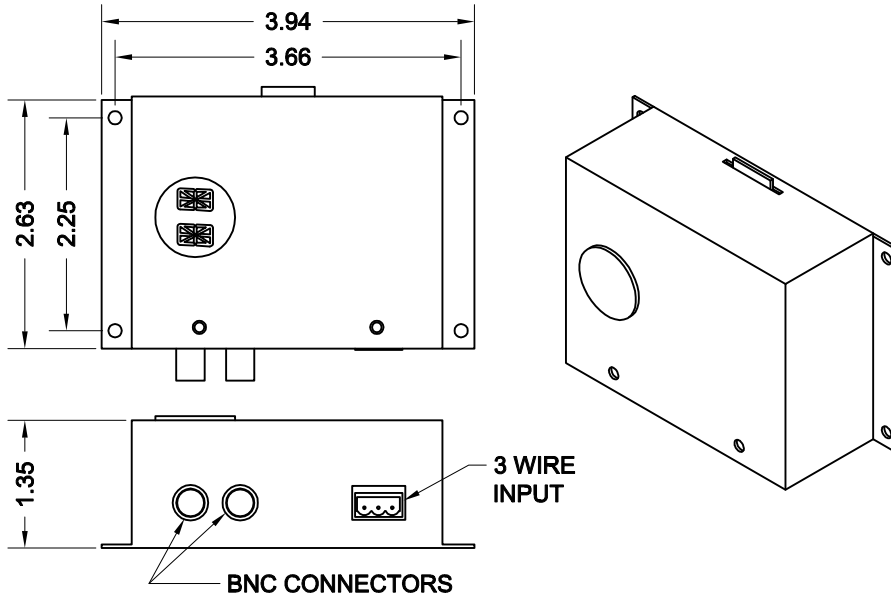


VIDEO OVERLAY

The MVIDSYS-X is an overlay system that can add floor position and direction to any NTSC or PAL-B video signal for security and liability applications. If the information is available on the link, the unit can also provide messages that are needed for elevator status. Installation of the unit utilizes existing coax wiring to the monitor, but will require the 3 wire Micro Comm link for lthe elevator information. This information can be gathered from an existing Micro Comm link in the car or can be obtained by installing a driver in the machine room and bringing the date down to the car on the 3 wire serial link to display floor position and elevator status.

Features:

- Powered by MICRO COMM - MICRO COMM driver not included
- Adjustable positioning
- Message handling
- Easy installation
- NTSC compatible
- PAL-B compatible
- Other interfaces can be made available such as CAN or RSL if needed (these links are subject to approval).

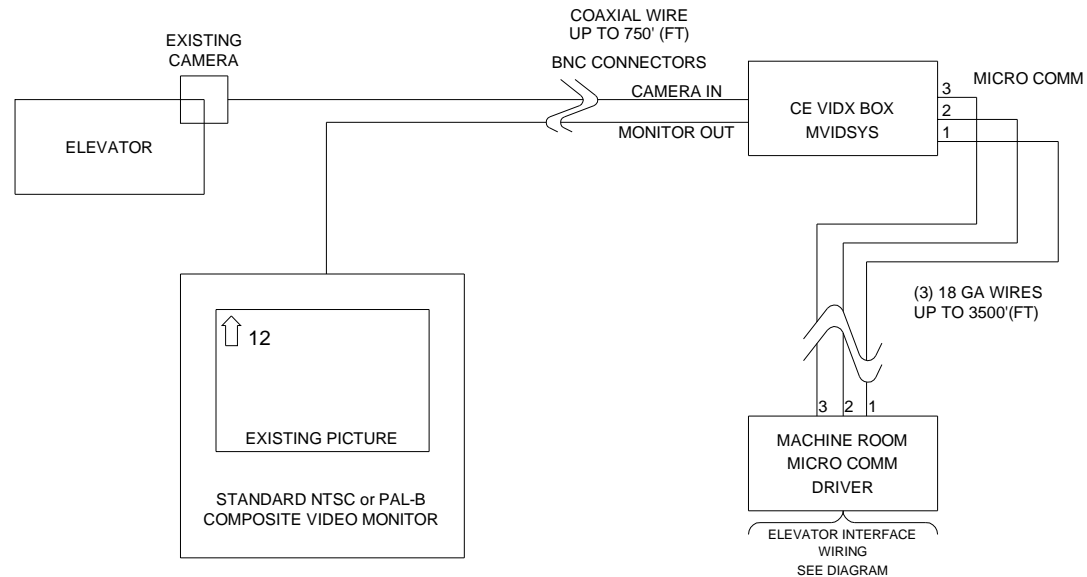


TO ORDER - SPECIFY MVIDSYS-X


N = NTSC
 P = PAL-B

JOB# _____

DIPSWITCH LEGEND



DEFAULT SETTINGS




ROTARY SWITCH #1 _____

ROTARY SWITCH #2 _____

CODE VERSION _____

HORIZONTAL POSITION
ADJUSTMENT

VERTICAL POSITION
ADJUSTMENT

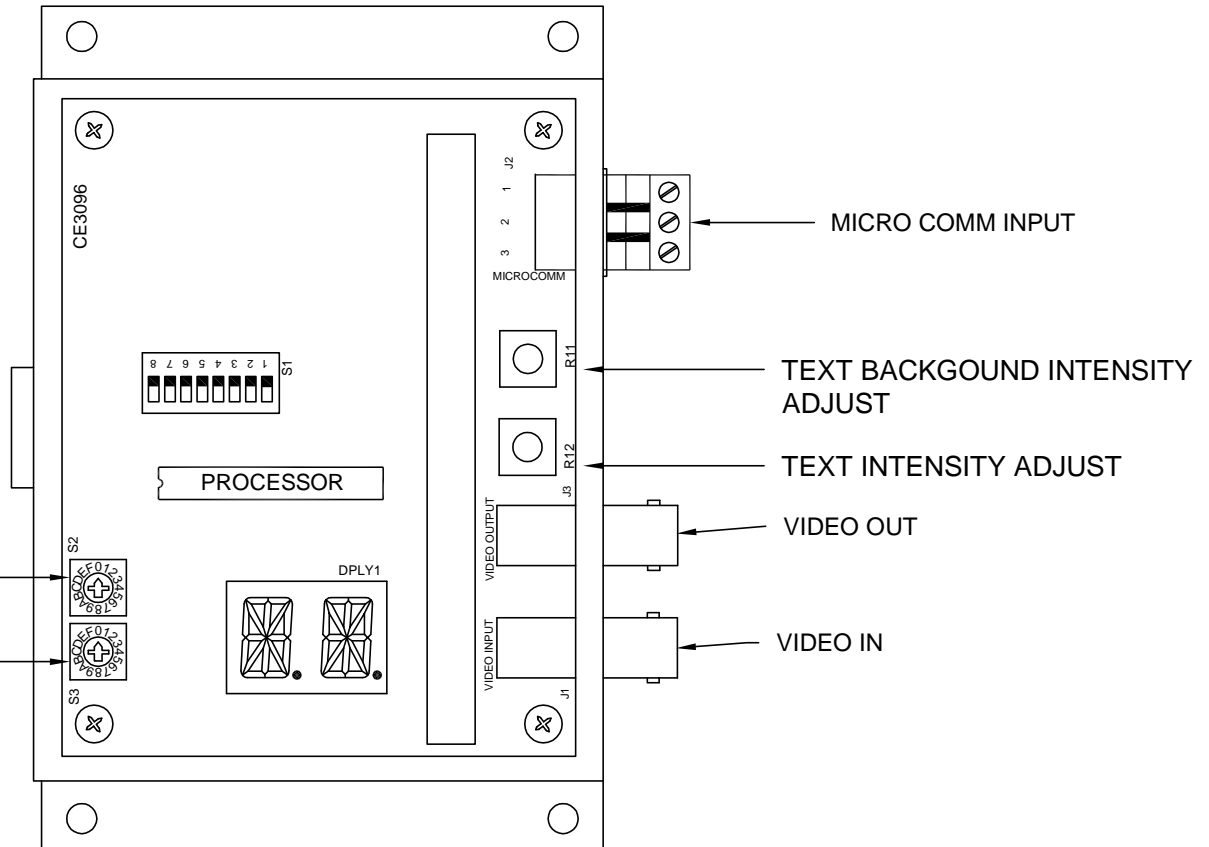

DIP SWITCH CHART

DIP #	FUNCTION	ON	OFF
1	TEST MODE	LEFT DOT: VIDEO INPUT RIGHT DOT: MODULE STATUS	LEFT DOT: MESSAGE PRESENT RIGHT DOT: DOOR SIGNAL PRESENT
2	HORIZONTAL SCREEN POSITION	DATA APPEARS ON THE RIGHT SIDE OF THE SCREEN	DATA APPEARS ON THE LEFT SIDE OF THE SCREEN
3	VERTICAL SCREEN POSITION	DATA APPEARS ON THE LOWER PORTION OF THE SCREEN	DATA APPEARS ON THE UPPER PORTION OF THE SCREEN
4	DIRECTION ARROW POSITION	ARROWS APPEAR TO THE RIGHT OF THE FLOORS	ARROWS APPEAR TO THE LEFT OF THE FLOORS
5	ARROW SIGNAL SOURCE	ARROWS FOLLOW THE ARRIVAL SIGNALS	ARROWS FOLLOW THE TRAVELING SIGNALS
6	FLOOR/ARROW FONT SIZE	LARGE FONT	SMALL FONT
7	MESSAGE FONT SIZE	LARGE FONT	SMALL FONT
8	NOT USED		

LENS NUMBER:	BOARD # & REV: 3096
APPROVED BY:	
Signature: _____	
Date: _____	
Company: _____	

DATE DRAWN: 07/29/04	LAST DATE REVISED	SCALE NONE	PART #:
DRAWN BY: K.L.S.	TOLERANCE UNLESS OTHERWISE SPECIFIED: +0.015,-0.015		 C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, Ohio 43506 (419) 636-6705
REQUESTED BY: T.E.	TOLERANCE FOR CUTOFF (WINDOW): +0.020,-0.000		
TITLE: MVIDSYS			DWG. NO. CE3096
			REV: