

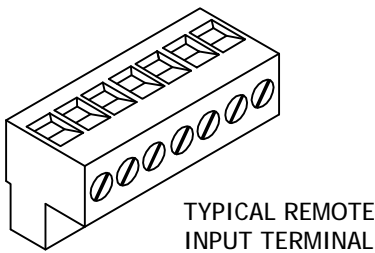


SEC01-XXXX


JOB# _____

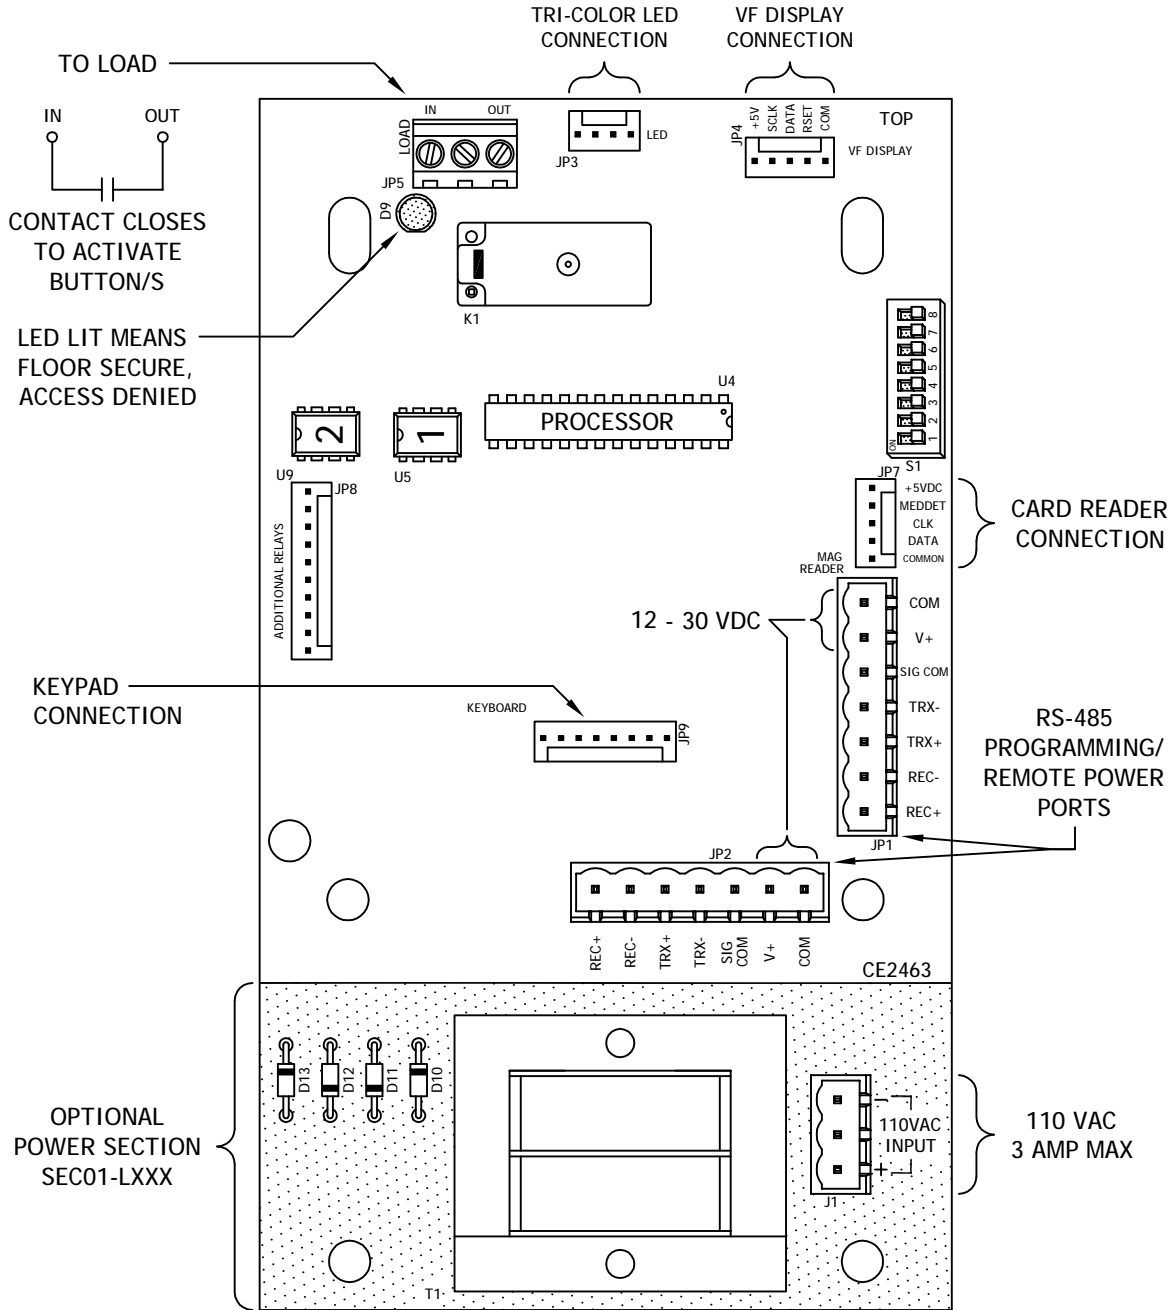

DIP SWITCH DETAIL



DEFAULT SETTINGS



UNIT ADDRESS MUST BE DIFFERENT FOR EACH SEC01 IN A SYSTEM.

CODE VERSION _____

BOARD VERSION CE2463 _____



DATE DRAWN: 04/18/97	DRAWN BY: K.L.S.	REQUESTED BY: M.W., T.E.	 C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, OH 43306 (419) 636-6705
BOARD NUMBER: 2463	LAST DATE REVISED: 10/05/20	APPROVED BY:	
PRODUCT SINGLE LANDING SECURITY SYSTEM			DWG. NO. SEC01009 REV: G

SEC01-XXXX

SECURITY ACCESS SYSTEM INFORMATION

DIP 1	OFF	NORMAL OPERATING MODE
	ON	SELF-TEST MODE
DIP 2	OFF	TRI-COLOR LED INDICATOR
	ON	16-CHARACTER VF DISPLAY
DIP 3	OFF	NOT USED
	ON	SHOULD REMAIN OFF
DIP 4	OFF	INSERTION-TYPE CARD READER
	ON	SWIPE-TYPE CARD OR PROXIMITY READER

DIP 8	DIP 7	DIP 6	DIP 5	LANDING NUMBER
OFF	OFF	OFF	OFF	1
OFF	OFF	OFF	ON	2
OFF	OFF	ON	OFF	3
OFF	OFF	ON	ON	4
OFF	ON	OFF	OFF	5
OFF	ON	OFF	ON	6
OFF	ON	ON	OFF	7
OFF	ON	ON	ON	8
ON	OFF	OFF	OFF	9
ON	OFF	OFF	ON	10
ON	OFF	ON	OFF	11
ON	OFF	ON	ON	12
ON	ON	OFF	OFF	13
ON	ON	OFF	ON	14
ON	ON	ON	OFF	15
ON	ON	ON	ON	16

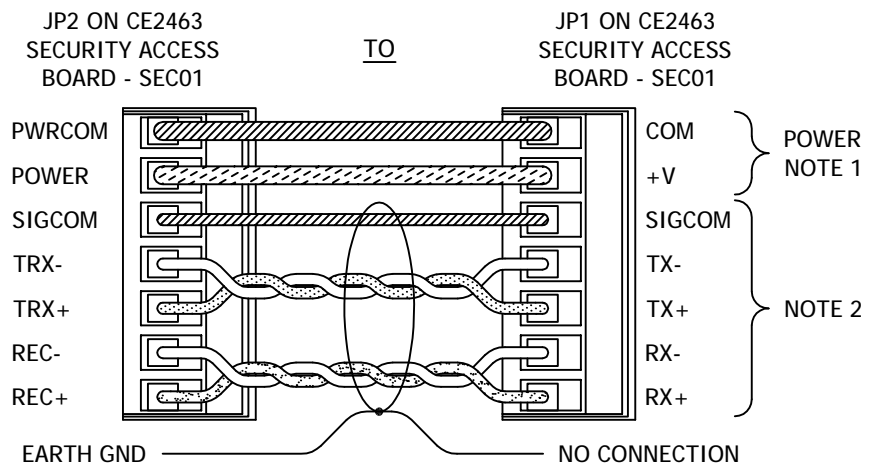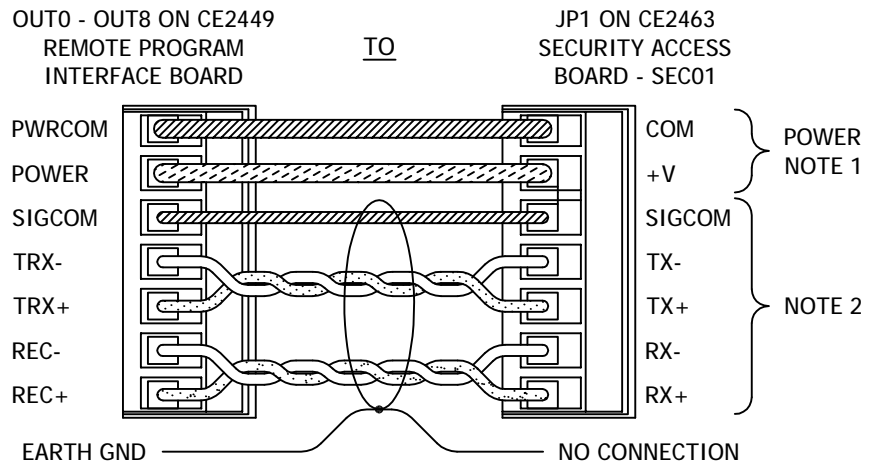

24 AWG SHIELDED, TWISTED PAIR WIRES
(SHIELDS MUST BE CONNECTED TO EARTH GROUND AS INDICATED)

NOTES:

- On SEC01-RXXX units ONLY.**
Use 18 AWG or larger wire to connect power (V+ and COM) to the unit.
- Connect using three 24 AWG shielded, twisted pair wires. One wire of the SIGCOM pair will not be used.
- If communication problems occur during programming, call Tech Support at 419-636-6705 for instructions on installing termination resistors.

DATE DRAWN: 08/04/99	DRAWN BY: KLS	REQUESTED BY: JP, TE	C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, OH 43506 (419) 636-6705
BOARD NUMBER: 2463	LAST DATE REVISED: 01/18/18	APPROVED BY:	
PRODUCT SEC01 SECURE ACCESS SYSTEM INFORMATION			DWG. NO. SEC01004
			REV. F