

OV401

JOB# _____

DS7 - ENABLE "S" BUTTON
Only directions are announced until "S" button (JP8) is pressed, then announce floors until direction of travel changes (inclusive).

*PLAY STROBE TIME DELAY
0 = OFF 1 = ON

DIP 5	DIP 6	TIME DELAY
0	0	NO DELAY
1	0	300 mSEC
0	1	600 mSEC
1	1	900 mSEC


ADDS TIME DELAY FROM STROBE TO BEGINNING OF VOICE ANNOUNCEMENT

S1 DIP SWITCH DETAIL



VOICE SELF-TEST
NOT USED
NOT USED
NOT USED
PLAY STROBE
TIME DELAY
ENABLE S BUTTON
NOT USED

S1 - VOICE DEFAULT SETTINGS



MICRO COMM OUTPUT

VOICE EPROM 1

VOICE EPROM 2

VOICE CODE VERSION _____


MOTIS CODE VERSION _____

BOARD VERSION CE2768 _____






FACTORY PRESET - DO NOT ADJUST

TONE ADJUSTMENTS


VOLUME CONTROL

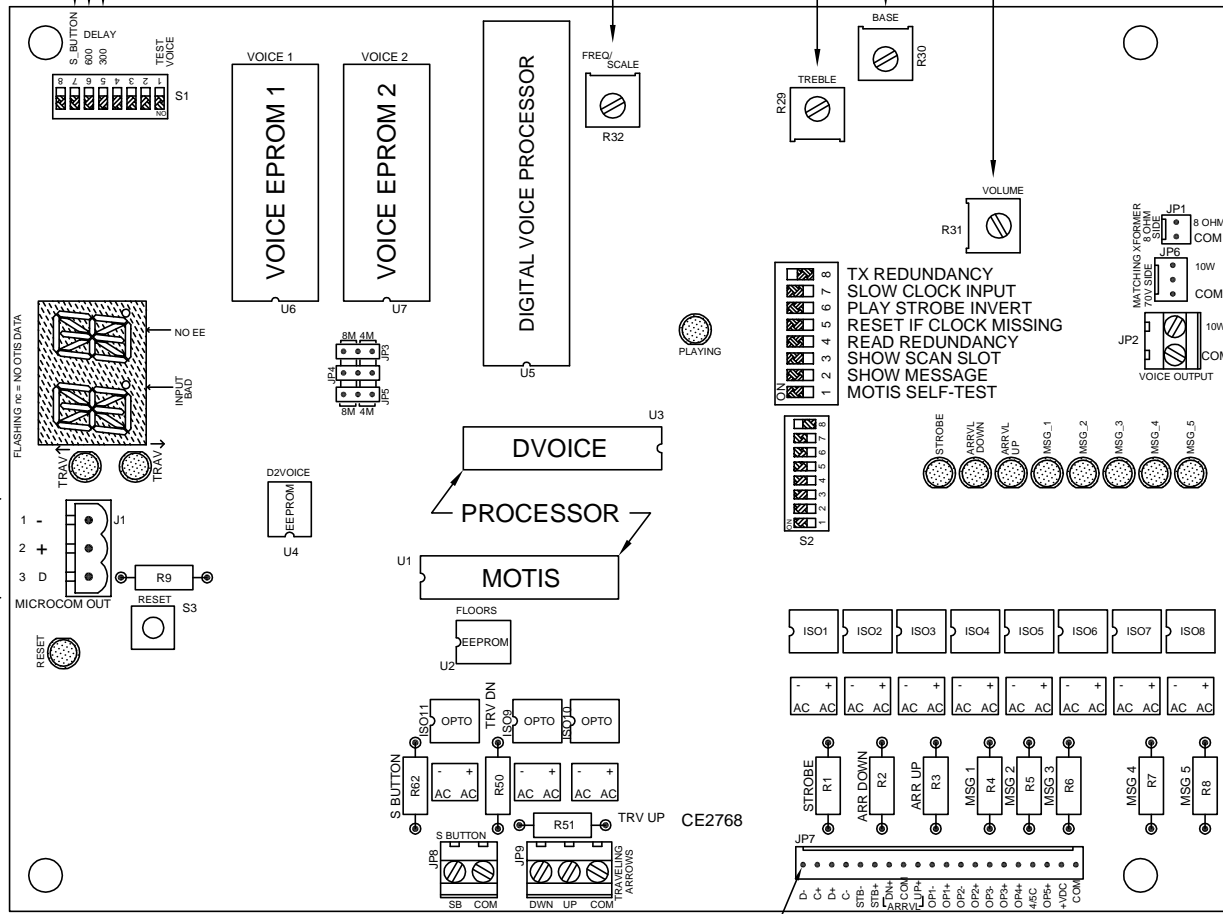

TX REDUNDANCY
SLOW CLOCK INPUT
PLAY STROBE INVERT
RESET IF CLOCK MISSING
READ REDUNDANCY
SHOW SCAN SLOT
SHOW MESSAGE
MOTIS SELF-TEST

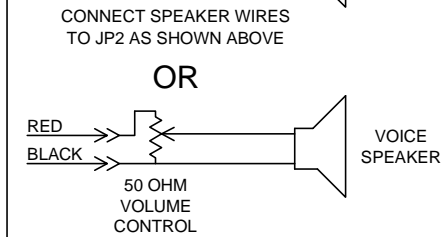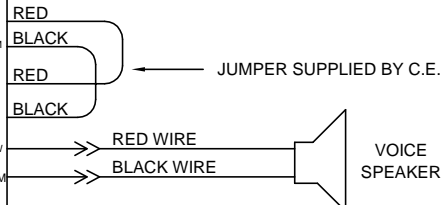

S2 - MOTIS DEFAULT SETTINGS




PIN 1 SEE JP7 WIRING DIAGRAM ON BACK

CONNECT S-BUTTON OPTION HERE
CONNECT UP/DOWN TRAVEL ARROWS HERE


DATE DRAWN: 04/20/2006	DRAWN BY: DAC	REQUESTED BY: MG	<p>C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, Ohio 43306 (419) 636-6705</p>
BOARD NUMBER: 2768	LAST DATE REVISED: 12/22/06	APPROVED BY:	
PRODUCT OV401 - MOTIS VOICE UNIT			
DWG. NO. OV401 01			REV: A

JP7 WIRING

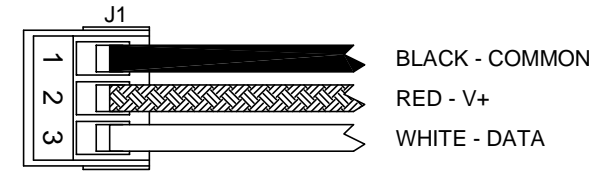


MICRO COMM OUTPUT


SHUNTS ARE USED ON JP3, JP4, AND JP5 BASED ON THE SIZE OF THE VOICE EPROMS. THE SHUNTS ARE SHOWN IN THE 8M POSITION (FOR 8 MEG EPROMS). SHUNTS SHOULD BE IN THE 4M POSITION FOR 4 MEG EPROMS. CONSULT THE DOCUMENTATION INCLUDED WITH THE UNIT TO DETERMINE EPROM SIZE. THE SHUNTS ARE INSTALLED AT THE FACTORY AND SHOULDN'T NEED TO BE MOVED UNLESS THE VOICE EPROMS ARE CHANGED.



NOTE A - Using SPARE CONTACT in Nudging Relay (K10) normally found between terminals 13 and 14. Tie 14 to A6-TB1-3 and tie 13 to BLU/WHT wire from voice harness.



NOTE B - Bring wire from CAR, /ECL, EXPRESS PRIORITY, to machine room using a spare in the traveler. Tie to ORG/BLK wire from the voice harness.

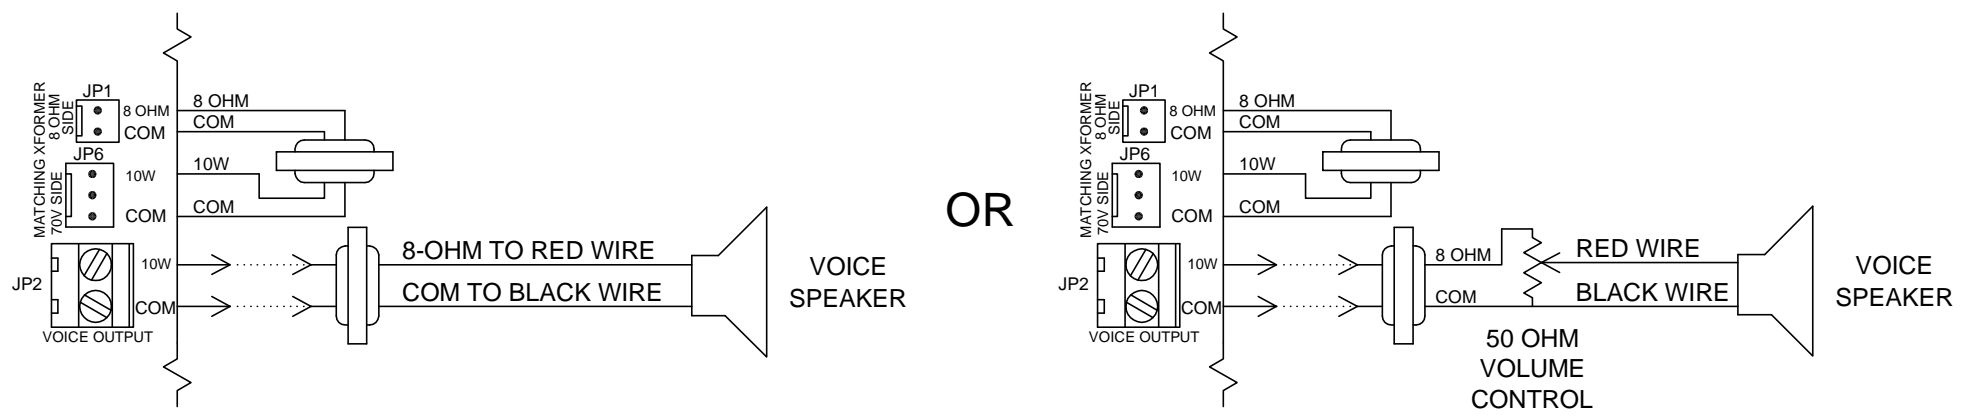

REMOTE SPEAKER CONNECTION

DATE DRAWN: 04/26/06	DRAWN BY: DAC	REQUESTED BY: MG	 C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, Ohio 43506 (419) 636-6705
BOARD NUMBER: 2768	LAST DATE REVISED: -	APPROVED BY: -	
PRODUCT: OV401 WIRING INFORMATION			
ENG. NO.: OV401 02			REV: -