




C.E. Electronics, Inc.
 2107 Industrial Drive
 Bryan, OH 43506
 PH (419) 636-6705 FX (419) 636-2516
 www.cееlectronics.com

OVETC-XX

Ver. 7 Rel. 11/04/2016

OTIS


PANEL PREPARATION

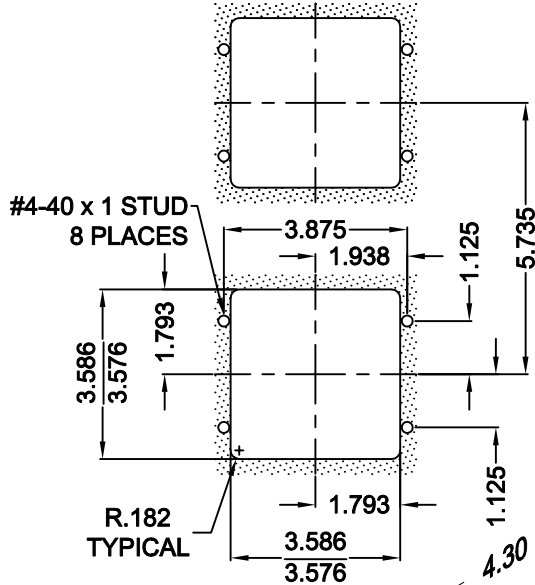

NOTE:
1-1/2 INCH MINIMUM
DEPTH OF UNIT

RENEWAL PARTS

Lens: 104-6025A EXT.
 Lens: 104-6056A NON EXT.

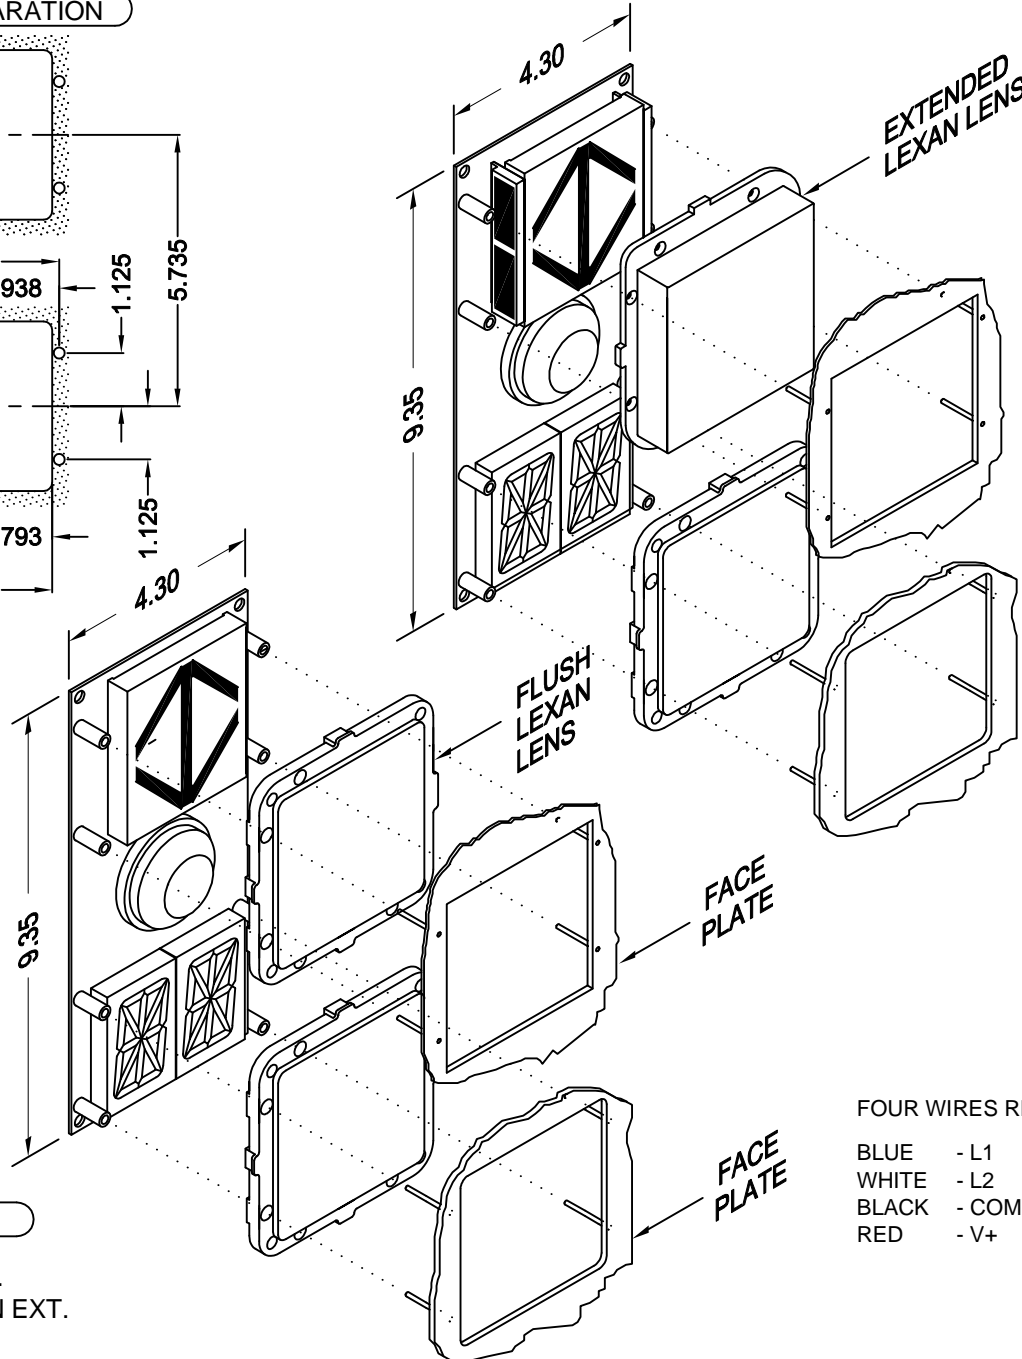

OVETC-XX 3.0 INCH LED EXTENDED ARROW

Long life, solid state bi-color, white or blue arrow for lanterns, 100,000 hour rated life. Accepts existing signals over the Otis RSL link. The unit has a double digit 2 inch display. It includes a bi-color arrow which is green in the up direction and red in the down, solid blue or white with matching side bars for 180° viewing. The unit is also equipped with an arrival gong. The programming is dip switch selectable.

Typical Applications

- Hall and car lanterns
- P.I. combo w/180° Viewing angle

Features

- Bi-color, solid white or solid blue 3 inch arrow
- 2 inch characters - red, green, blue, or white
- Solid side bar/arrow
- 180° viewing angle lantern
- 1 year factory warranty
- Conforms to ADAAG 4.10.4
- Includes gong
- RSL input
- ECA capable

TO ORDER - SPECIFY OVETC-XX

FOUR WIRES REQUIRED:

BLUE - L1
 WHITE - L2
 BLACK - COMMON
 RED - V+

E = EXTENDED
 F = FLUSH

LED COLOR:

"R" = RED
 "G" = GREEN
 "B" = BLUE
 "W" = WHITE