
## SC015-X

JOB# \_\_\_\_\_

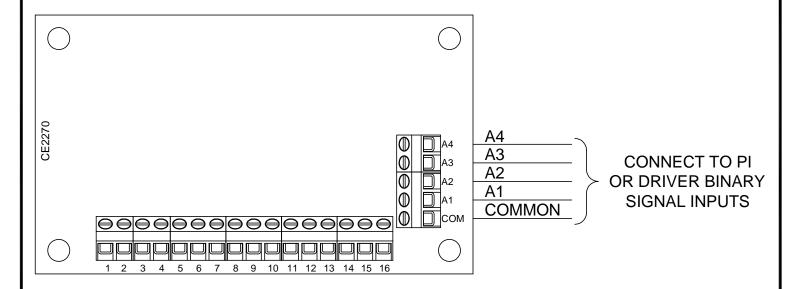

FLOOR SIGNALS FROM THE CONTROLLER MUST CONNECT TO THE NUMBERED INPUT TERMINALS ON THE DECODER BOARD AS SHOWN BELOW FOR THE CORRECT MARKINGS TO DISPLAY ON THE POSTION INDICATOR.

- 1 \_\_\_\_\_
- 2 \_\_\_\_\_
- 3
- 4 \_\_\_\_\_
- 5
- 6 \_\_\_\_\_
- 7 \_\_\_\_\_
- 8 \_\_\_\_\_
- 9 \_\_\_\_\_
- 10 \_\_\_\_\_
- 11 \_\_\_\_\_
- 12 \_\_\_\_\_
- 13 \_\_\_\_\_
- 14 \_\_\_\_\_
- 15 \_\_\_\_\_
- 16 COMMON

DATE DRAWN:	DRAWN BY:	REQUESTED BY:		
10/31/94	K.L.S.	DR, DC	C.E. ELECTRONICS, I	NC.
BOARD NUMBER:	LAST DATE REVISED:	APPROVED BY:	Bryan, Ohio 43506	
2270	07/30/07		(419) 636-6705	
PRODUCT			DWG. NO.	REV:
SC015-X - 15 INPUT TO BINARY DECODER			SC015001	ΙB

BOARD VERSION CE2270 \_\_\_\_\_