




C.E. Electronics, Inc.
 2107 Industrial Drive
 Bryan, OH 43506
 PH (419) 636-6705 FX (419) 636-2516
 www.ceelectronics.com


DV220-XXXXX

Ver. 7 Rel. 08/17/2011

COMPETITOR
 DOT MATRIX

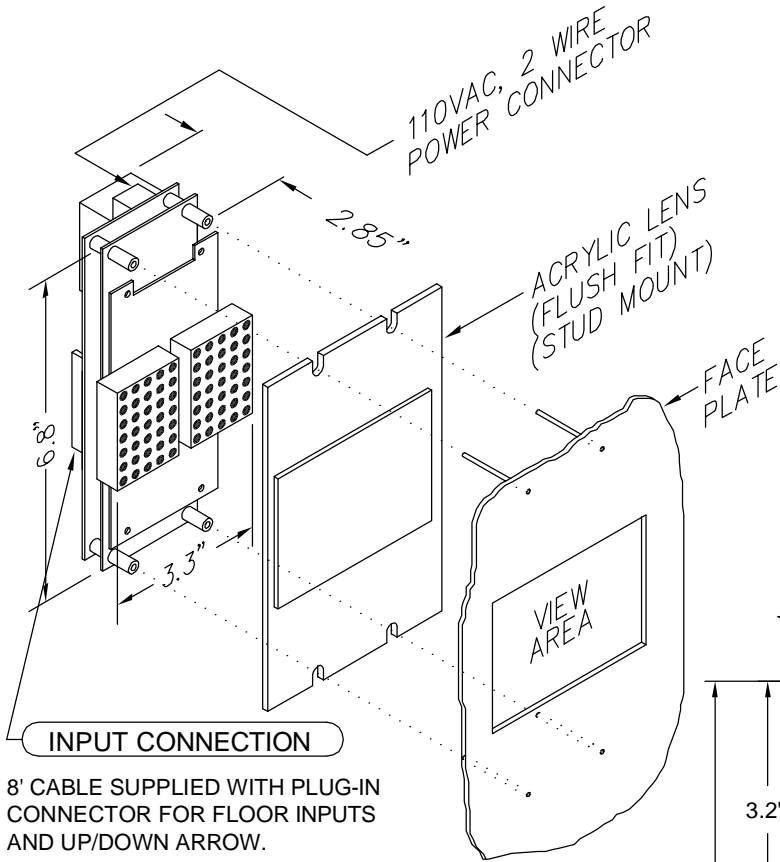

8' CABLE SUPPLIED WITH PLUG-IN CONNECTOR FOR FLOOR INPUTS AND UP/DOWN ARROW.

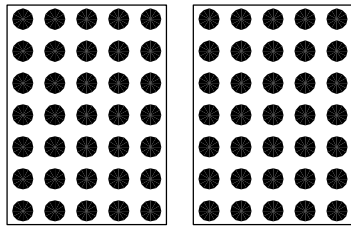

2" CHARACTERS


NOTE:

1. If a special voltage is required, please consult factory.
2. * 110VAC not required for power supply on Micro Comm units
3. * Blue can not be mixed with other colors

RENEWAL PARTS

- Lens: 104-5576 RED
- Lens: 104-6076 GRAY
- Lens: 104-9076 BLUE

PANEL PREPARATION

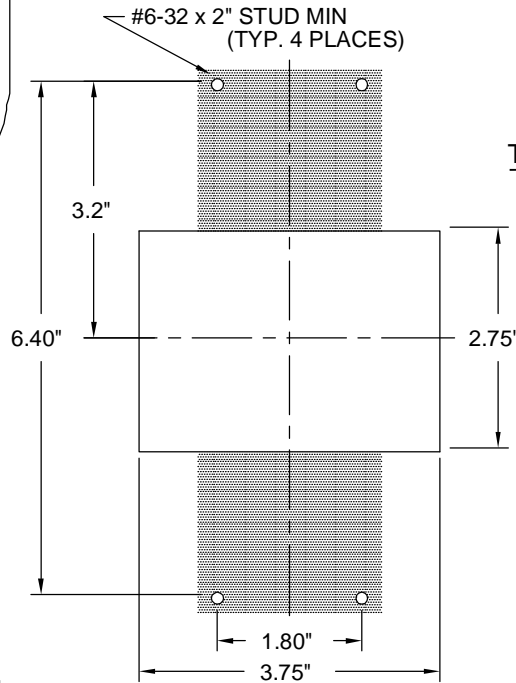

CUTOUT TOLERANCE: +0.020
 - 0.0

DOT MATRIX LED DIGITAL INDICATOR

Dot matrix LED digital indicator for floor position display, as well as car direction, if desired. Any alphanumeric or custom character can be displayed in either single digit with arrow or double digit floor designations.

Typical Applications

- Hall stations
- Jamb mount

Features

- Low cost design
- Self contained unit
- Latched input
- Self testing
- Scrolling
- Passing chime output
- Error detection and correction feature
- UL listed

TO ORDER:-SPECIFY DV220 - X X X X X

COLOR:

- "0" = MIXED
- "R" = RED
- "A" = AMBER
- "G" = GREEN
- "B" = BLUE *
- "W" = WHITE

LENS:

- "R" = RED
- "G" = GRAY
- "B" = BLUE
- "X" = NO LENS

SIGNAL FORMAT:

- "1" = SINGLE LINE/FLOOR
- "2" = BINARY
- "3" = UNITS & TENS
- "4" = GRAY CODE
- "5" = INVERTED BINARY
- "6" = SPECIAL
- "X" = IF MICRO COMM

NUMBER OF INPUTS:

- "0" = 16 INPUT OR LESS
- "1" = 31 INPUT
- "M" = MICRO COMM *

SIGNAL VOLTAGE:

- "A" = POSITIVE 6-20VDC, 6-24VAC
- "B" = POSITIVE 24-48VDC, 24-48VAC
- "C" = 120VAC
- "D" = POSITIVE 125VDC
- "E" = NEGATIVE 6-20VDC
- "F" = NEGATIVE 24-48VDC
- "G" = NEGATIVE 125VDC
- "X" = IF MICRO COMM