




C.E. Electronics, Inc.
 2107 Industrial Drive
 Bryan, OH 43506
 PH (419) 636-6705 FX (419) 636-2516
 www.ceelectronics.com

OAHE-FX

Ver. 4 Rel. 09/11/09

OTIS





(2.415" L x 4.15" H x 0.910" D)


THREE WIRES REQUIRED:

- BLACK - COMMON
- RED - DOWN
- BROWN - UP

1 1/2" MIN. DEPTH FOR ENCLOSURE

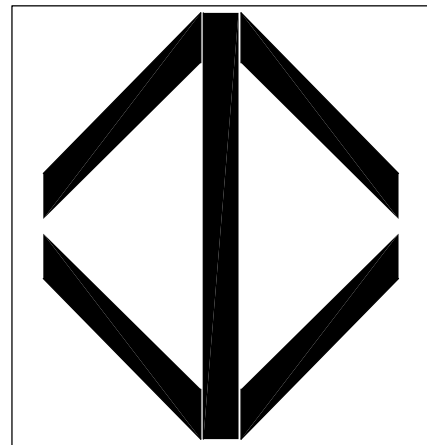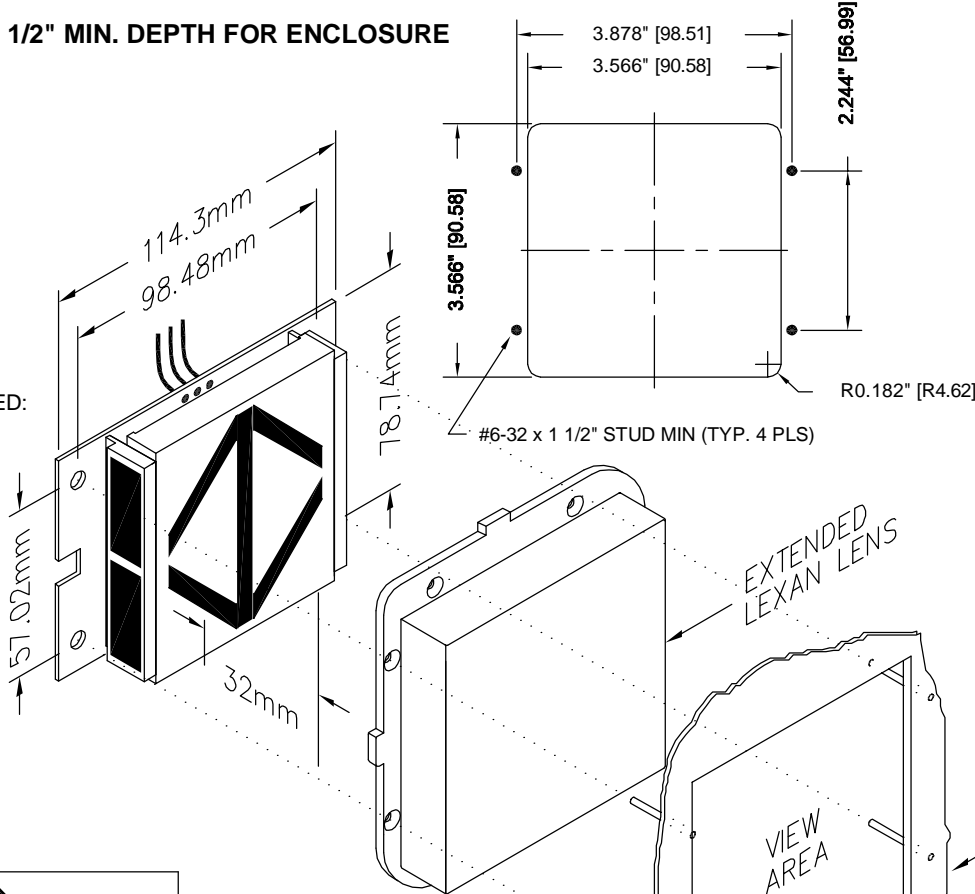

3.0" ARROW

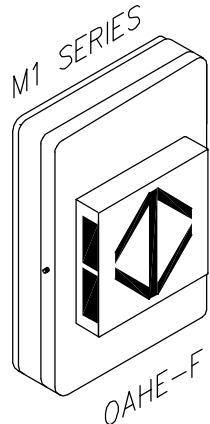

CAN BE USED ON M2 FLUSH AS WELL

OAHE-FX

3.0" LED EXTENDED ARROW

Long life, solid state bi-color or blue arrow for lanterns, 100,000 hour rated life. Accepts existing signals within the standard Otis range. The bi-color arrow is green for up and red for down or optional solid blue with matching side bars for 180° viewing.

Typical Applications:

- Hall and car lanterns with 180° viewing angle.
- For Otis advance series style fixtures, horizontal or vertical mounting.

Features:

- Otis advance series mounting
- Ultra-thin packaging
- Bi-color or Solid Blue
- Red down / green up
- Solid side bar / arrow - Bi-color or Solid Blue
- 180° viewing angle
- 1 year factory warranty
- Conforms to ADAAG 4.10.4
- Includes gong

TO ORDER - SPECIFY OAHE-FX

SIGNAL INPUTS
 -24/-30VDC

COLOR:
 "B" = BLUE
 "X" = BI-COLOR

RENEWAL PARTS

Display board: 931570000X
 Gong: TG024-NF1
 Lens: 104-6025