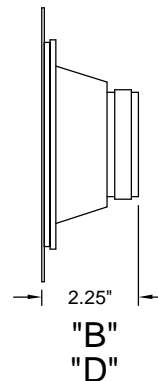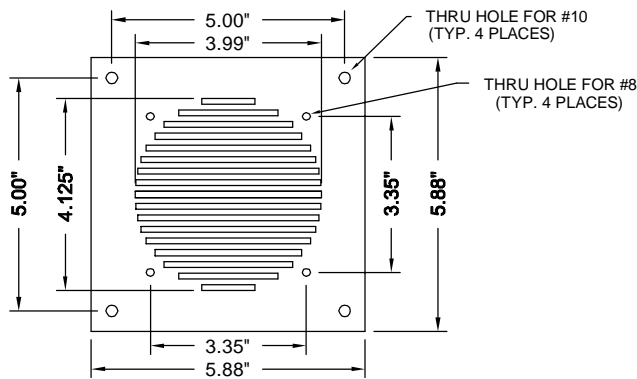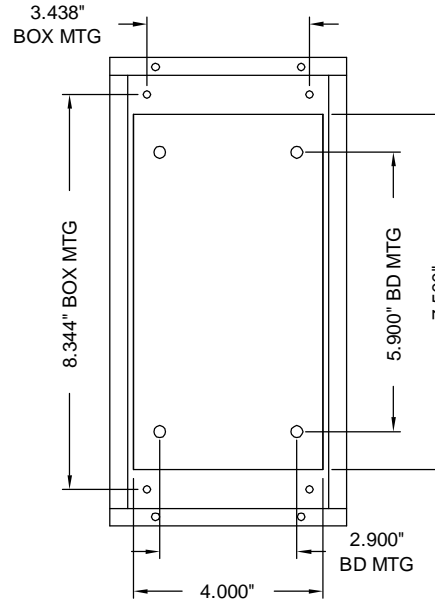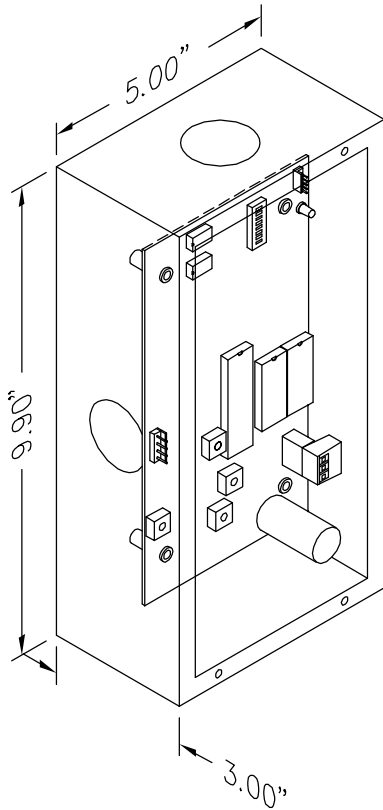**C.E. Electronics, Inc.**
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705 FX (419) 636-2516
www.ceelectronics.com

OV411-X
Ver. 4 Rel. 03/30/10

OTIS ®
411 SERIES

OV411-X

OTIS SERIAL VOICE

The basic system includes up to eighty different messages, with a total message time of 5 minutes. The device works with the Otis serial (RSL link) link and gets its data from the link. Position, direction and priority messages as well as door strobe are available.

Features:
- Custom vocabulary
- Up to 5 min. of speech
- Capable of 80 Messages
- Human voice
- Male and female voices
- Add on to existing P.I.'s
- Includes sealed mid-range speaker
- Conforms to ADAAG 4.10.13

3.438" BOX MTG

8.344" BOX MTG

5.900" BD MTG

7.500"

2.900" BD MTG

4.000"

THRU HOLE FOR #10 (TYP. 4 PLACES)

THRU HOLE FOR #8 (TYP. 4 PLACES)

5.00"
3.99"
5.00"
4.125"
3.35"
5.88"
3.35"
5.88"

2.25"
"B"
"D"

TO ORDER - SPECIFY OV411-X

SPEAKER FORMAT:
"B" = 2.25" DEEP
"D" = 2.25" WATER RESISTANT
"C" = SPECIAL

5.00"
9.00"
3.00"