

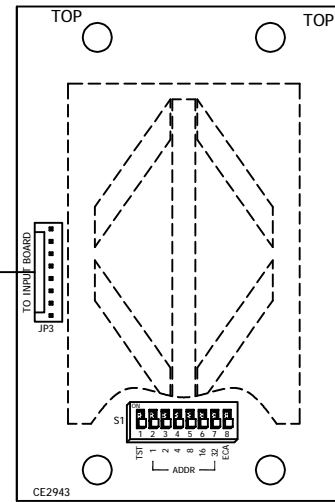


OV125-XX


JOB# _____

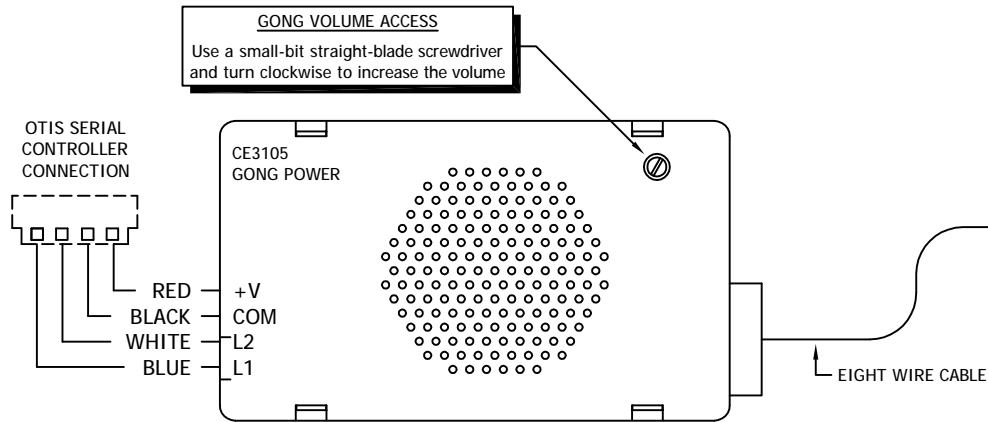

DIP SWITCH DETAIL



DEFAULT SETTINGS




1	2	4	8	16	32	VALUE	1	2	4	8	16	32	ADDRESS
OFF	OFF	OFF	OFF	OFF	OFF	INVALID	OFF	OFF	OFF	OFF	ON	ON	ADDRESS 32
ON	OFF	OFF	OFF	OFF	OFF	INVALID	ON	OFF	OFF	OFF	OFF	ON	ADDRESS 33
OFF	ON	OFF	OFF	OFF	OFF	INVALID	OFF	ON	OFF	OFF	OFF	ON	ADDRESS 34
ON	ON	OFF	OFF	OFF	OFF	INVALID	ON	ON	OFF	OFF	OFF	ON	ADDRESS 35
OFF	OFF	ON	OFF	OFF	OFF	ADDRESS 4	OFF	OFF	ON	OFF	OFF	ON	ADDRESS 36
ON	OFF	ON	OFF	OFF	OFF	ADDRESS 5	ON	OFF	ON	OFF	OFF	ON	ADDRESS 37
OFF	ON	ON	OFF	OFF	OFF	ADDRESS 6	OFF	ON	ON	OFF	OFF	ON	ADDRESS 38
ON	ON	ON	OFF	OFF	OFF	ADDRESS 7	ON	ON	ON	OFF	OFF	ON	ADDRESS 39
OFF	OFF	OFF	ON	OFF	OFF	ADDRESS 8	OFF	OFF	ON	OFF	ON	ON	ADDRESS 40
ON	OFF	OFF	ON	OFF	OFF	ADDRESS 9	ON	OFF	OFF	ON	OFF	ON	ADDRESS 41
OFF	ON	OFF	ON	OFF	OFF	ADDRESS 10	OFF	ON	OFF	ON	OFF	ON	ADDRESS 42
ON	ON	OFF	ON	OFF	OFF	ADDRESS 11	ON	ON	OFF	ON	OFF	ON	ADDRESS 43
OFF	OFF	ON	ON	OFF	OFF	ADDRESS 12	OFF	OFF	ON	ON	OFF	ON	ADDRESS 44
ON	OFF	ON	ON	OFF	OFF	ADDRESS 13	ON	OFF	ON	ON	OFF	ON	ADDRESS 45
OFF	ON	ON	ON	OFF	OFF	ADDRESS 14	OFF	ON	ON	ON	OFF	ON	ADDRESS 46
ON	ON	ON	ON	OFF	OFF	ADDRESS 15	ON	ON	ON	ON	OFF	ON	ADDRESS 47
OFF	OFF	OFF	OFF	ON	OFF	ADDRESS 16	OFF	OFF	OFF	OFF	ON	ON	ADDRESS 48
ON	OFF	OFF	OFF	ON	OFF	ADDRESS 17	ON	OFF	OFF	OFF	ON	ON	ADDRESS 49
OFF	ON	OFF	OFF	ON	OFF	ADDRESS 18	OFF	ON	OFF	OFF	ON	ON	ADDRESS 50
ON	ON	OFF	OFF	ON	OFF	ADDRESS 19	ON	ON	OFF	OFF	ON	ON	ADDRESS 51
OFF	OFF	ON	OFF	ON	OFF	ADDRESS 20	OFF	OFF	ON	OFF	ON	ON	ADDRESS 52
ON	OFF	ON	OFF	ON	OFF	ADDRESS 21	ON	OFF	ON	OFF	ON	ON	ADDRESS 53
OFF	ON	ON	OFF	ON	OFF	ADDRESS 22	OFF	ON	ON	OFF	ON	ON	ADDRESS 54
ON	ON	ON	OFF	ON	OFF	ADDRESS 23	ON	ON	ON	OFF	ON	ON	ADDRESS 55
OFF	OFF	OFF	ON	ON	OFF	ADDRESS 24	OFF	OFF	OFF	ON	ON	ON	ADDRESS 56
ON	OFF	OFF	ON	ON	OFF	ADDRESS 25	ON	OFF	OFF	ON	ON	ON	ADDRESS 57
OFF	ON	OFF	ON	ON	OFF	ADDRESS 26	OFF	ON	OFF	ON	ON	ON	ADDRESS 58
ON	ON	OFF	ON	ON	OFF	ADDRESS 27	ON	ON	OFF	ON	ON	ON	ADDRESS 59
OFF	OFF	ON	ON	ON	OFF	ADDRESS 28	OFF	OFF	ON	ON	ON	ON	ADDRESS 60
ON	OFF	ON	ON	ON	OFF	ADDRESS 29	ON	OFF	ON	ON	ON	ON	ADDRESS 61
OFF	ON	ON	ON	ON	OFF	ADDRESS 30	OFF	ON	ON	ON	ON	ON	ADDRESS 62
ON	ON	ON	ON	ON	OFF	ADDRESS 31	ON	ON	ON	ON	ON	ON	ADDRESS 63

CHART TO SELECT ADDRESS WITH DIP SWITCH

CODE VERSION _____

BOARD VERSION CE2943 _

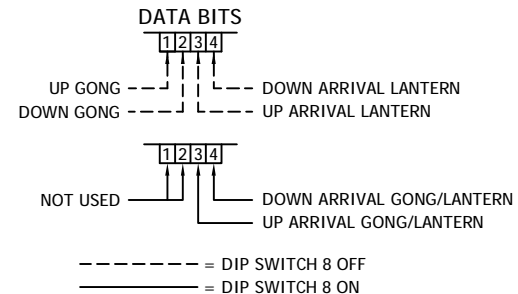

DS1	DS8	FUNCTION
ON	--	SELF-TEST MODE
OFF	OFF	GONG USES BIT 1 UP (SINGLE) AND BIT 2 DOWN (DOUBLE)
OFF	ON	GONG USES BIT 3 UP AND BIT 4 DOWN (BOTH SINGLE)

DATE DRAWN: 01/31/24	DRAWN BY: DAC	REQUESTED BY: KP	C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, OH 43506 (419) 636-6705
BOARD NUMBER: 2943, 3105	LAST DATE REVISED: -	APPROVED BY:	
PRODUCT OV125 - REMOTE DISPLAY INDICATOR		DWG. NO. OV125-01-B	