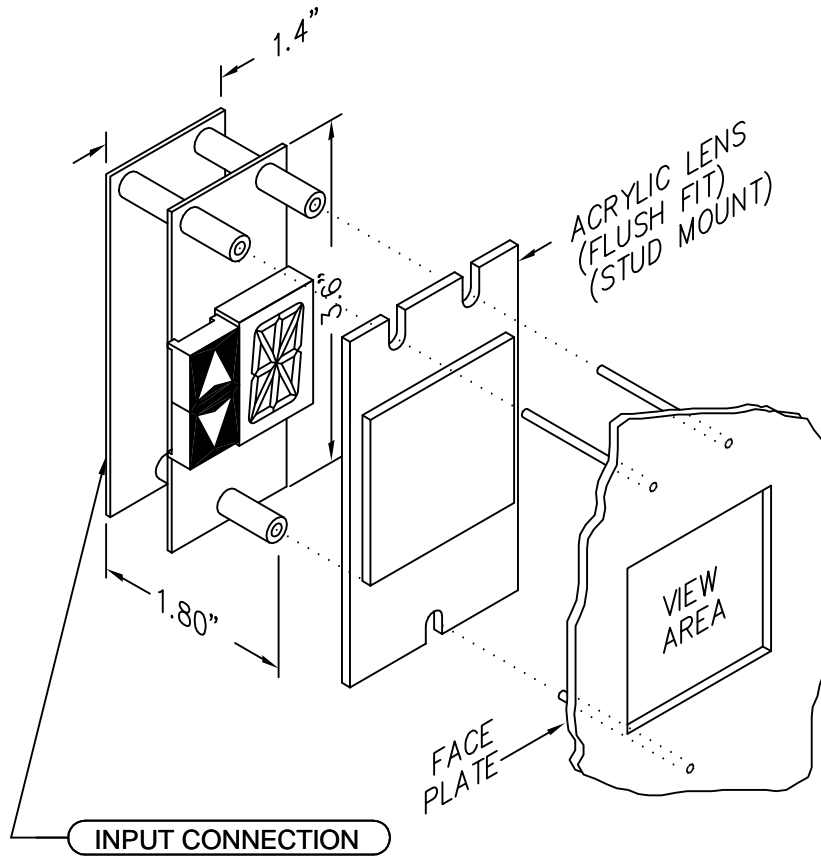**C.E. Electronics, Inc.**
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705  FX (419) 636-2516
www.ceelectronics.com

# MV310-XXX
Ver. 5  Rel. 10/11/2019
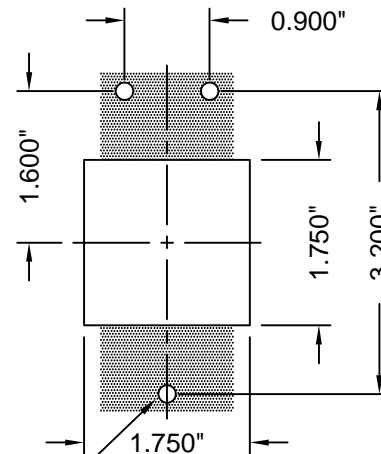
MICRO COMM®
DISPLAYS

1.4"

ACRYLIC LENS
(FLUSH FIT)
(STUD MOUNT)

1.80"

FACE
PLATE

VIEW
AREA

INPUT CONNECTION

1" CHARACTER

## REMOTE DISPLAY INDICATOR "RDI"

Segmented LED, digital indicator for floor position display, as well as car direction.  Any alphanumeric character can be displayed.

### Typical Applications
• Hall stations
• Lobby and security panels

### Features
• Fast, 3-wire hookup
• Latched inputs
• Cross wire protected
• Self testing
• Alternate message
• Passing chime output
• Error detection and correction feature

## RENEWAL PARTS

Lens: 104-5647 RED
Lens: 104-6047 GRAY
Lens: 104-9047 BLUE

## PANEL PREPARATION

0.900"

1.600"

1.750"

3.200"

1.750"

#6-32 x 1 3/4" STUD MIN
(TYP. 3 PLACES)

CUTOUT TOLERANCE: +.020
- 0.0

### TO ORDER - SPECIFY MV310 - X X X
COLOR:
 "RR" = RED w/RED ARROWS
 "AR" = AMBER w/RED ARROWS
 "GR" = GREEN w/RED ARROWS
 "BR" = BLUE w/RED ARROWS
 "WR" = WHITE w/RED ARROWS
 "GG" = GREEN w/GREEN ARROWS
 "BB" = BLUE w/BLUE ARROWS
 "WW" = WHITE w/WHITE ARROWS

LENS:
 "R" = RED
 "G" = GRAY
 "B" = BLUE
 "X" = NO LENS

NOTE:

1. This is not a stand alone unit.  Must be used in conjunction with a Micro Comm interface.